

# PORTOR<sup>®</sup>

L I G H T I N G

WWW.PORTORLIGHTING.COM



## CATALOG 2025 EDITION

CONTROLS

RESIDENTIAL

INDOOR

OUTDOOR

EXIT & EMERGENCY

ACCESSORIES







PORTOR  
LIGHTING


Portor Industry is a proudly diverse workplace, employing individuals from different nationalities, ethnicities, religions, and social orientations. At Portor Industry, we believe that bringing together individuals from different backgrounds and belief systems solidifies our bonds and creates a stable and healthy environment, which, in turn, helps us better service our customers.

Portor Industry, Inc., located in Ontario, California, is a LED manufacturing company specializing in the production of high-quality, economically priced industrial, commercial, and residential LED lighting. Working with businesses across America, our goal is to be at the forefront of 21st century lighting technology by continuing to introduce superior, superbly designed, affordable LED lights to the American marketplace.

Portor Industry's clientele is distributor-based. Relationships with our customers are paramount, and we pride ourselves on maintaining communication long after a sale is made. It is through this philosophy, and our exceptional product line, that Portor Industry continues to grow exponentially.

**PORTORINDUSTRY®**  
A LED LIGHTING MANUFACTURER

# TABLE OF CONTENTS

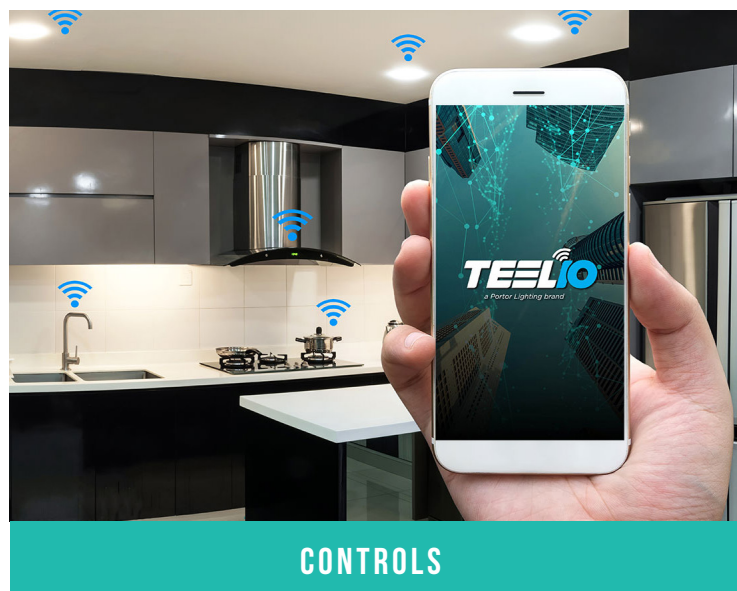

TEELIO .....	6	PT-1WS-MS-BT-A .....	8
PT-MS-BT.....	6	PT-RTC-D-BT.....	9
PT-MS-35-BT.....	6	PT-GTB-D-BT.....	9
PT-BTN.....	6	TEELIO READY .....	10-19
PT-A-EMS-MW .....	6		
PT-MS-21-BT-JB.....	7		
PT-BTC-EM .....	7		
PT-BTC-6 .....	7		
PT-BTC-20 .....	7		
PT-5WS-BT-B.....	8		
PT-3WS-BT-B.....	8		
PT-3WS-BT-A.....	8		




PT-DL31-EDL.....	20	PT-DLFG2-R .....	44
PT-DL31-BL .....	22	PT-DLS2-R .....	46
PT-DLS-21-R .....	24	PT-DLS2-S .....	48
PT-DLSB-R-FR .....	26	PT-DLSB2-R .....	50
PT-DLS-R-FR.....	28	PT-DLSM2-R .....	52
PT-DLR-B-5C3P-2 .....	30	PT-DLSM2-S .....	56
PT-DLR-S 5C3P-2.....	32	PT-DDL2 .....	58
PT-DLJ-B .....	34	PT-DMS .....	60
PT-DLR-C .....	36		
PT-DLR-C-277 .....	38		
PT-DLR-G .....	40		
PT-DLG2-R .....	42		



PT-CDL2 .....	62	PT-LS1 .....	86
PT-LHTL-2C3P .....	64	PT-WAA .....	88
PT-LHB .....	66	PT-WAM .....	88
PT-RHB .....	70	PT-WAS .....	88
PT-RHBE .....	72	PT-WA2-4F7I-3CP .....	90
PT-TRO-HO .....	74	PT-WAFA-4F9I-3CCT .....	90
PT-TRO2 .....	76	PT-STL-4F-3CP .....	92
PT-BLP8 .....	78	PT-CBL3 .....	94
PT-VS-WD .....	80	PT-T8 LED TUBE .....	96
PT-VS-MO .....	80		
PT-VT2 .....	82		
PT-LS-HO .....	84		



PT-ALN2 .....	98	PT-WPH3 .....	118
PT-ALE .....	100	PT-WPM3 .....	120
PT-ABL-R Series .....	102	PT-FLHO .....	122
PT-CAT2 .....	104	PT-FLM2 .....	124
PT-CAS1 .....	106	PT-FLS1 .....	126
PT-BL .....	108		
PT-WPF .....	110		
PT-WPA .....	112		
PT-WPR .....	114		
PT-WPC .....	116		

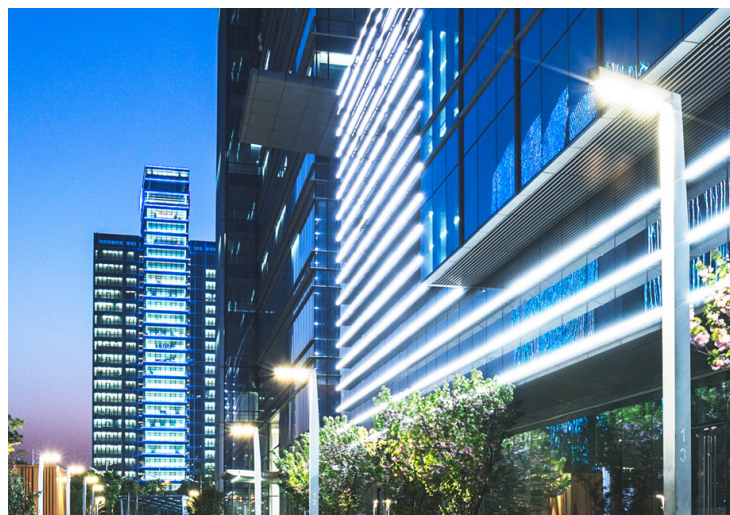

## OUTDOOR

PT-EXL-EDL-1-R-CLR-AL . . . .	130	<b>COLOSSUS LIGHTING</b>	
PT-EXL-EDL-2-R-MIR-AL . . . .	130	CLVS-MO . . . . .	134
PT-EXL-C-S-RC . . . . .	131	CLVS-WD . . . . .	134
PT-EML-S-RC . . . . .	131	CLRHF . . . . .	135
PT-EXL-C-SLM-RED . . . . .	132	CLFL1 . . . . .	135
PT-EXL-C-R . . . . .	132		
PT-EXL-C-S . . . . .	132		
PT-EXL-2-RED . . . . .	132		
PT-EXL-2 . . . . .	133		
PT-EXL-2-SAL . . . . .	133		
PT-EML-R . . . . .	133		
PT-EML-S . . . . .	133		



## EXIT/EMERGENCY/COLOSSUS

EM BATTERY .....	136-137	ROUND HIGH BAY	
SDT SERIES .....	138	ACCESSORIES .....	141
SENSORS .....	139	AL2N ACCESSORIES .....	141
MC SERIES .....	138	AIRCRAFT WIRING .....	141
REMOTE CONTROL UNIT ....	139	REMOTE HEAD FOR	
REPLACEMENT TRIMS .....	140	EML SERIES .....	141
ROUGH PLATE .....	140	POLE ACCESSORIES .....	142
SMK KIT .....	140		
FLANGE KIT .....	140		
WIRE GUARDS .....	141		
PT-ABL-R SHIELD .....	141		



## ACCESSORIES






Actual size



## PT-MS-BT Bluetooth 4pin Sensor

The PT-MS-BT is a low-voltage sensor engineered for seamless luminaire integration, enabling Luminaire Level Lighting Control (LLLC) functionality for panel, troffer, strips, and potentially many more lighting fixtures. This compact unit combines daylight harvesting and PIR occupancy sensing to transform luminaires into intelligent lighting solutions.

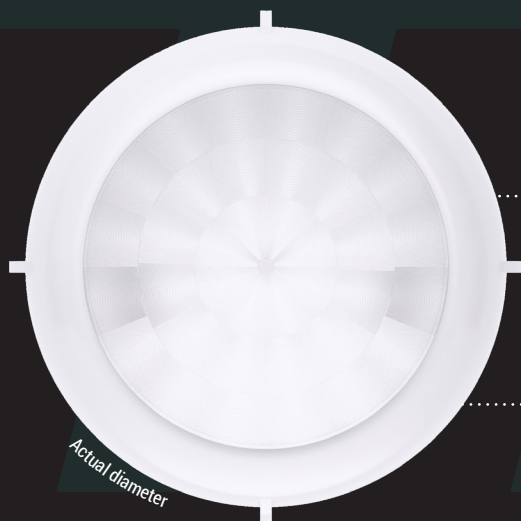


Actual diameter




## PT-MS-35-BT Bluetooth Audiojack Sensor

PT-MS-35-BT low voltage high bay sensors are ideal for Luminaire Level Lighting Control (LLLC) applications. Featuring integrated daylight harvesting and a 40FT range for PIR motion sensing, the PT-MS-35-BT sensors are designed for pre-installation in linear high bay or round high bay luminaires.

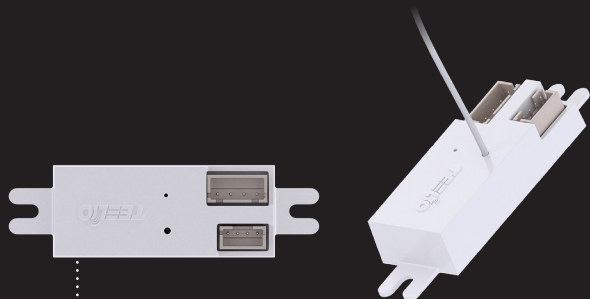

## PT-BTN\* Bluetooth Node

Powered by a DC12V auxiliary source, the PT-BTN enables Luminaire Level Lighting Control (LLLC) capabilities in a miniature design with integrated "sensor-ready" functionality to provide connectivity to the non Bluetooth microwave sensor PT-A-EMS-MW.

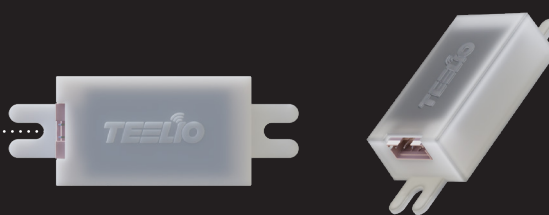

## PT-A-EMS-MW\* Micro Eco Sensor

The PT-A-EMS-MW extends the capabilities of a host controller device by providing Microwave Occupancy detection with adjustable sensitivity inputs. As non-Bluetooth devices, the PT-A-EMS-MW are designed to operate with either the PT-BTN Bluetooth Node or the PT-BTC-6 Bluetooth Controller.



### PT-MS-21-BT-JB

Bluetooth Dual Tech Ceiling Sensor

The PT-MS-21-BT-JB is a line-voltage dual-tech occupancy sensor with daylight harvesting. Utilizing Teelio Bluetooth technology, integrating PIR and ultrasonic technologies for precise detection across a 600 sq ft area.



### PT-BTC-EM\*

Bluetooth EM Controller


The PT-BTC-EM is a UL924-compliant emergency lighting controller designed for networked emergency lighting systems. It detects power interruptions in buildings and wirelessly signals the emergency circuit luminaires to override control inputs. Ideal for backup power systems like UPS or generators.



### PT-BTC-6\*

Bluetooth Controller

The 6A Bluetooth Fixture Controller seamlessly converts luminaires to wireless control for integration with the TEELIO Bluetooth system. Supporting 6 Amps, it can connect multiple fixtures in new construction applications.

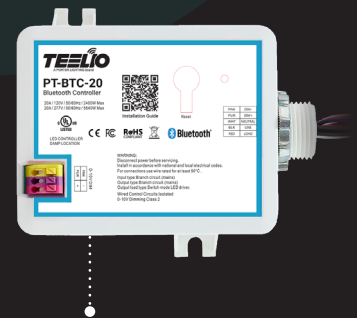

### PT-BTC-20\*

20A Bluetooth Controller

The 20A Bluetooth Fixture Controller seamlessly converts luminaires to wireless control for integration with the TEELIO Bluetooth system. Supporting 20 Amps, it can connect multiple fixtures in new construction applications.


\*Not the actual size



## PT-5WS-BT-B

### Battery 5 Button Wall Switch

The Teelio PT-5WS-BT-B is a battery-powered Bluetooth wall switch that controls Teelio Bluetooth fixtures with ON/OFF, DIM+/DIM-, AUTO, and three customizable scene settings. It also serves as a remote controller for managing your TEELIO ecosystem within its wireless range, ensuring reliable and secure Bluetooth communication.

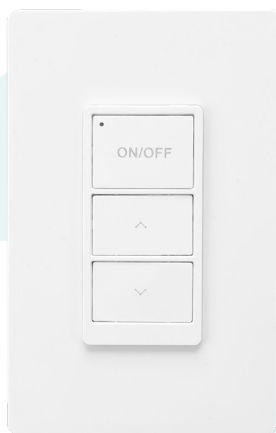

## PT-3WS-BT-B

### Battery 3 Button Wall Switch

The PT-3WS-BT-B is a versatile, battery-powered Bluetooth wall switch that controls TEELIO Bluetooth enabled fixtures with ON/OFF and DIM+/DIM- functions. It can also serve as a remote controller within its wireless range, ensuring reliable and secure communication.



## PT-3WS-BT-A

### AC 3 Button Wall Switch

The PT-3WS-BT-A is a versatile line-voltage Bluetooth wall switch that controls TEELIO Bluetooth enabled fixtures with ON/OFF and DIM+/DIM- functions. It can be used to retrofit a standard wall switch.



## PT-1WS-MS-BT-A

### PIR Sensor Wall Switch

The PT-1WS-MS-BT-A is a line voltage PIR sensor switch that automatically switches off when no motion is detected within the designated time frame. It features a relay and photocell, ensuring activation only when ambient light levels are below a specified threshold.





### PT-RTC-D-BT

BT Real Time Clock/Energy Monitoring USB-A Dongle

The PT-RTC-D-BT is a USB dongle featuring a Real-Time Clock (RTC) and energy monitoring capabilities. It connects via a USB-A port and is powered by an integrated CR2032 battery. This device allows users to generate reports of detailed usage reports by capturing and analyzing consumption data every 15 minutes.





### PT-GTB-D-BT

Gateway Bridge USB-A Dongle

The PT-GTB-D-BT is a USB dongle gateway bridge that's Title 24 compliant. It connects via Bluetooth to TEELIO-enabled devices and interfaces through Wi-Fi with third-party systems, including BACnet-based building management systems. It supports both Modbus TCP and REST APIs over Wi-Fi, offering versatile connectivity solutions.



Scan the QR code to download the TEELIO app and unlock the full experience of being in complete control. Start enjoying seamless, intuitive management at your fingertips.






Portor's Sensor Ready luminaire with multiple wattage and CCT selector.

+



Combined with TEELIO's PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.

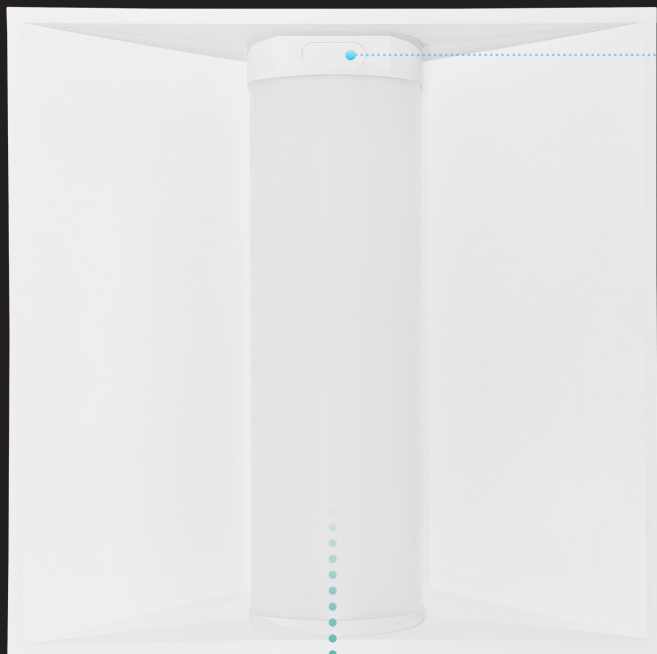

Shown is PT-TR0-22-3CP-SR



## PT-MS-BT

Bluetooth 4pin Sensor

The PT-MS-BT is a low-voltage sensor engineered for seamless luminaire integration, enabling Luminaire Level Lighting Control (LLLC) functionality for panel, troffer, strips, and potentially many more lighting fixtures. This compact unit combines daylight harvesting and PIR occupancy sensing to transform luminaires into intelligent lighting solutions.



## TROFFER ▶

Portor's **Sensor Ready TRO** luminaire, combined with TEELIO's PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.



### PT-TRO-24-3CP-SR

2' x 4' Sensor Ready Center Basket Troffer with CCT and Wattage Selector



### PT-TRO-22-3CP-SR

2' x 2' Sensor Ready Center Basket Troffer with CCT and Wattage Selector



### PT-TRO-14-3CP-SR

1' x 4' Sensor Ready Center Basket Troffer with CCT and Wattage Selector

CONTROLS



### PT-TRO-24-3CP-RTK-SR

2' x 4' Sensor Ready Center Basket Troffer Retrofit Kit



### PT-TRO-22-3CP-RTK-SR

2' x 2' Sensor Ready Center Basket Troffer Retrofit Kit

## RTK

Upgrades existing 2'x4' fluorescent troffers or louvers to LED with our reliable LED troffer retrofit kit fully assembled within the frame.

## FLAT PANEL ▶

Portor's **Sensor Ready BLP** luminaire, combined with TEELIO's PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.



### PT-BLP-24-3CP-SR

2' x 4' Sensor Ready Back-lit Flat Panel with CCT and Wattage Selector



### PT-BLP-22-3CP-SR

2' x 2' Sensor Ready Back-lit Flat Panel with CCT and Wattage Selector



### PT-BLP-14-3CP-SR

1' x 4' Sensor Ready Back-lit Flat Panel with CCT and Wattage Selector

## STRIP LIGHT ▶

Portor's **Sensor Ready LS** luminaire, combined with TEELIO's PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.



### PT-LS-2F-3CP-SR

2' Sensor Ready Linear Strip Luminaire with CCT and Wattage Selector



### PT-LS-4F-3CP-SR

4' Sensor Ready Linear Strip Luminaire with CCT and Wattage Selector



### PT-LS-8F-3CP-SR

8' Sensor Ready Linear Strip Luminaire with CCT and Wattage Selector





## SENSOR READY TROFFER

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-24-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	4,832	up to 148 lm/W
38W	5,348	
45W	6,199	

Based on 4000K, 80 CRI. Actual lumens may vary.

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-22-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,511	up to 145 lm/W
30W	4,150	
35W	4,753	

Based on 4000K, 80 CRI. Actual lumens may vary.

**1'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TR2-14-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,511	up to 145 lm/W
30W	4,150	
35W	4,753	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.



## PT-TRO-SR Series

2' x 4' / 2' x 2' / 1' x 4' Sensor Ready Center Basket Troffer with CCT and Wattage Selector


Portor's Sensor Ready TRO luminaire, combined with **TEELIO**'s PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.

Ideal use for office spaces, walkways, schools/campuses, shopping centers, hospitality and health care industry.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	120°
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

### DIMENSIONS

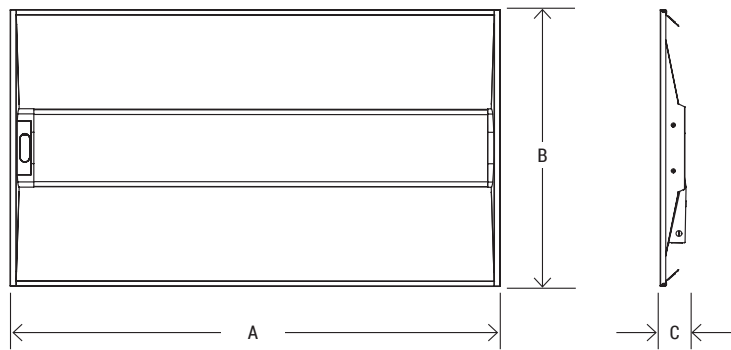

DIMENSION	PT-TRO-24-SR	PT-TRO-22-SR	PT-TRO-14-SR
A	47.8"	23.75"	47.8"
B	23.75"	23.75"	11.75"
C	2"	2"	2"







## SENSOR READY RETROFIT-KIT TROFFER

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-24-RTK-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	4,835	up to 148 lm/W
38W	5,348	
45W	6,199	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-22-RTK-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,511	up to 145 lm/W
30W	4,150	
35W	4,753	

*Based on 4000K, 80 CRI. Actual lumens may vary.*







## PT-TRO-RTK-SR Series

2' x 4' / 2' x 2' / 1' x 4' Sensor Ready Retrofit-Kit Troffer with CCT and Wattage Selector


Upgrades existing fluorescent troffers or louvers to LED with our reliable LED troffer retrofit kit fully assembled within the frame. Together with Portor's Sensor Ready TRO luminaire, combined with **TEELIO's** PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system. Effortlessly control fixtures right from your hand. The Sensor Ready TRO luminaire features wattage and CCT selector, eliminating the need to stock multiple color temperatures.

Ideal use for office spaces, walkways, schools/campuses, shopping centers, hospitality and health care industry.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	120°
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

### DIMENSIONS

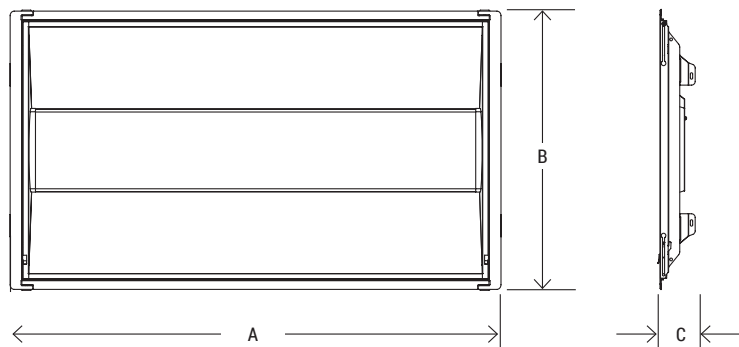

DIMENSION	PT-TRO-24-RTK-SR	PT-TRO-22-RTK-SR
A	47.8"	23.9"
B	23.9"	23.9"
C	3.1"	3.1"





## SENSOR READY FLAT PANEL

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP-24-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	3,652	up to 129 lm/W
40W	4,756	
50W	6,026	

Based on 4000K, 80 CRI. Actual lumens may vary.

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP-22-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,128	up to 123 lm/W
30W	3,721	
40W	4,766	

Based on 4000K, 80 CRI. Actual lumens may vary.

**1'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP-14-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,128	up to 123 lm/W
30W	3,721	
40W	4,766	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.





## PT-BLP-SR Series

2' x 4' / 2' x 2' / 1' x 4' Sensor Ready Back-lit Flat Panel Luminaire with CCT and Wattage Selector

Portor's Sensor Ready BLP luminaire, combined with **TEELIO**'s PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.


Perfect application for retail stores, schools, offices, markets and restaurant.

CONTROLS

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
IP RATING	Suitable for damp locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

### DIMENSIONS

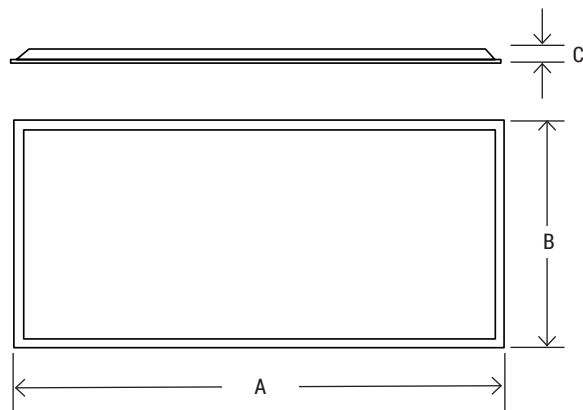

DIMENSION	PT-BLP8-24-SR	PT-BLP8-22-SR	PT-BLP8-14-SR
A	47.8"	23.7"	47.8"
B	23.7"	23.7"	11.8"
C	1.5"	1.5"	1.5"



8'



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-LS-8F-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
60W	7,676	up to 141 lm/W
75W	8,516	
90W	9,221	

Based on 4000K, 80 CRI. Actual lumens may vary.

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-LS-4F-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	3,838	up to 156 lm/W
38W	4,528	
45W	5,854	

Based on 4000K, 80 CRI. Actual lumens may vary.

2'



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-LS-2F-3CP-SR

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	2,173	up to 147 lm/W
20W	2,876	
25W	3,561	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.





## PT-LS-SR Series

2' / 4' / 8' Sensor Ready Linear Strip Luminaire with CCT and Wattage Selector

Portor's Sensor Ready LS luminaire, combined with **TEELIO's** PT-MS-BT sensor, offers seamless integration for a fully smart bluetooth lighting system.


The fixture includes standard surface mounting kit excellent for utility applications such as parking garage, warehouse, hallway, storage facility, restrooms and stairwell.

CONTROLS

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

### DIMENSIONS

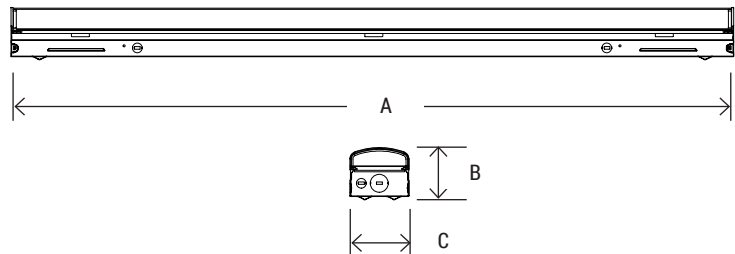

DIMENSION	PT-LS-8F-SR	PT-LS-4F-SR	PT-LS-2F-SR
A	94.2"	47.3"	22.2"
B	2.52"	2.52"	2.52"
C	2.83"	2.83"	2.83"



NEXT GENERATION LED DOWNLIGHT

3IN1

MOUNTING OPTIONS

- Junction Box
- Recessed Housing
- Can-less

6" APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DL31-EDL-6I-12W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	953 LM @ 2700K	up to 87 lm/W
	960 LM @ 3000K	
	1,010 LM @ 3500K	
	1,000 LM @ 4000K	
	973 LM @ 5000K	

Actual lumens may vary.

4" APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DL31-EDL-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	628 LM @ 2700K	up to 76 lm/W
	640 LM @ 3000K	
	659 LM @ 3500K	
	663 LM @ 4000K	
	642 LM @ 5000K	

Actual lumens may vary.




Specification is subject to change without notice.

Junction box installation



Recessed Housing installation

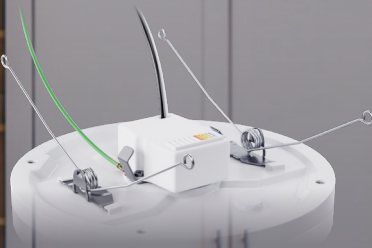

Can-Less installation





# PT-DL31-EDL Series

4"/6" Edge-Lit 3in1 Surface Mount with CCT Selector


## FEATURES

- New Construction or Retrofit Installation
- Easy installation
- Smooth light output
- 120° beam angle
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

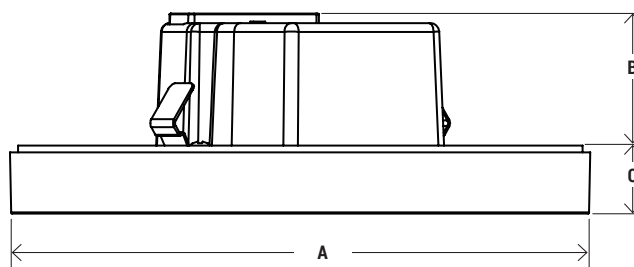

DIMENSION	PT-DL31-EDL-6I	PT-DL31-EDL-4I
A	7.2"	5"
B	1.77"	1.77"
C	.53"	.53"



### MOUNTING OPTIONS

- Junction Box
- Recessed Housing
- Can-less

**Direct Mounting**

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •





NEXT GENERATION LED DOWNLIGHT

3IN1

MOUNTING OPTIONS

- Junction Box
- Recessed Housing
- Can-less

6"  
APERTURE



PT-DL31-BL-6I-12W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	875 LM @ 2700K	up to 79 lm/W
	900 LM @ 3000K	
	950 LM @ 3500K	
	951 LM @ 4000K	
	910 LM @ 5000K	

Actual lumens may vary.

4"  
APERTURE




PT-DL31-BL-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	615 LM @ 2700K	up to 68 lm/W
	654 LM @ 3000K	
	683 LM @ 3500K	
	680 LM @ 4000K	
	628 LM @ 5000K	

Actual lumens may vary.




Specification is subject to change without notice.

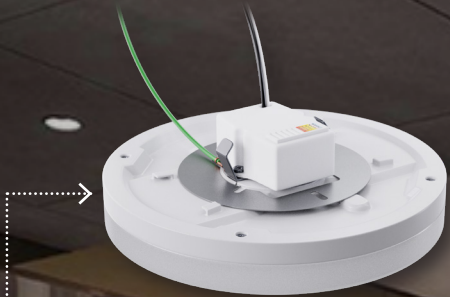

Junction box installation



Recessed Housing installation

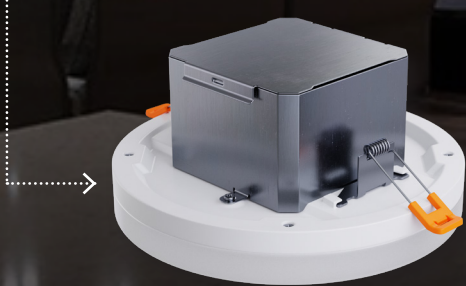

Can-Less installation





# PT-DL31-BL Series

4"/6" Back-Lit 3in1 Surface Mount with CCT Selector


## FEATURES

- New Construction or Retrofit Installation
- Easy installation
- Smooth light output
- 120° beam angle
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

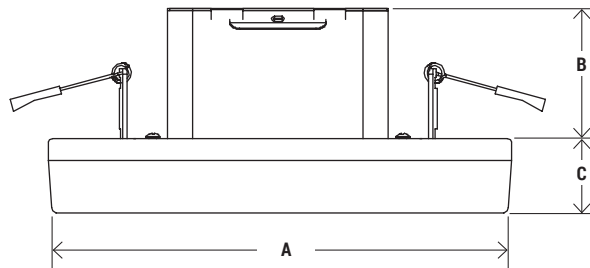

DIMENSION	PT-DL31-BL-6I	PT-DL31-BL-4I
A	7.2"	5"
B	2"	2"
C	1.25"	1.5"



### MOUNTING OPTIONS

- Junction Box
- Recessed Housing
- Can-less

## Direct Mounting

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •



NEXT GENERATION SLIM DOWNLIGHT

2IN1 MOUNTING OPTIONS

- Recessed Housing
- Can-less

6" APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLS-21-R-6I-14W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1,260 LM @ 2700K	up to 96 lm/W
	1,333 LM @ 3000K	
	1,385 LM @ 3500K	
	1,404 LM @ 4000K	
	1,395 LM @ 5000K	

Actual lumens may vary.

4" APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLS-21-R-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	843 LM @ 2700K	up to 90 lm/W
	874 LM @ 3000K	
	848 LM @ 3500K	
	910 LM @ 4000K	
	900 LM @ 5000K	

Actual lumens may vary.



Specification is subject to change without notice.





# PT-DLS-21-R Series

4"/6" Slim Disk 2in1 Downlight with CCT Selector


## FEATURES

- New Construction or Retrofit Installation
- Easy installation
- Smooth light output
- 120° beam angle
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

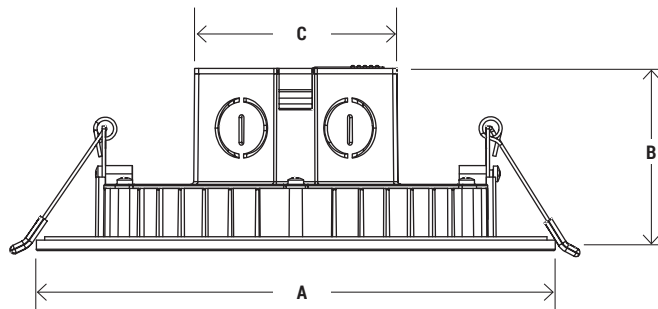

DIMENSION	PT-DLS-21-R-6I	PT-DLS-21-R-4I
A	7.4"	4.92"
B	2.6"	2.6"
C	2.9"	2.9"



**MOUNTING OPTIONS**  
• Recessed Housing  
• Can-less

**Direct Mounting**

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •





## NEXT GENERATION LED DOWNLIGHT



BAFFLE FINISH

6"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.



PT-DLSB-R-FR-6I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	975 LM @ 2700K	up to 80 lm/W
	1,018 LM @ 3000K	
	1,065 LM @ 3500K	
	1,080 LM @ 4000K	
	1,057 LM @ 5000K	

Based on IES results. Actual lumens may vary.

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.



PT-DLSB-R-FR-4I-12W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	817 LM @ 2700K	up to 89 lm/W
	934 LM @ 3000K	
	973 LM @ 3500K	
	977 LM @ 4000K	
	886 LM @ 5000K	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.





# PT-DLSB-R-FR Series

4"/ 6" 2-HR Fire Rated Slim Baffle Downlight with CCT Selector


(PROVIDING A REINFORCED AND HEAT RESISTANT STEEL CASING)

Portor's 2-hour fire-rated recessed downlight is an exceptional lighting solution designed to prioritize safety without compromising on aesthetics or functionality. This innovative fixture is engineered to withstand the rigors of a fire for up to two hours, making it an essential choice for commercial and residential applications where fire protection is paramount.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP	-4°F~104°F
WARRANTY	5 year limited

## DIMENSIONS

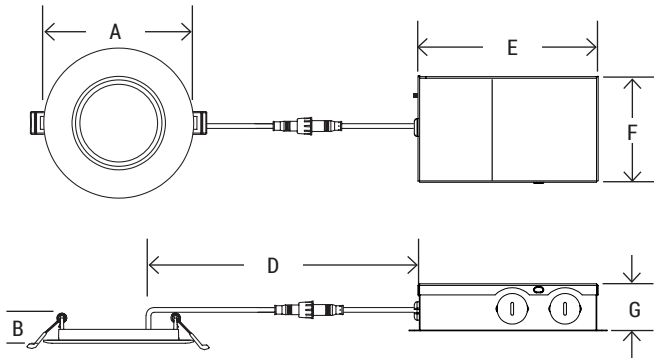

DIMENSION	PT-DLS-R-FR-6I	PT-DLS-R-FR-4I
A	7"	5"
B	1.5"	1"
CUT-OUT	6.25"	4.25"
D	12"	
E	5.4"	
F	3.1"	
G	1.3"	



Tested to comply with UL 263, ASTM E119 & CAN ULC S101



# NEXT GENERATION LED DOWNLIGHT



**6"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-DLS-R-FR-6I-15W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,104 LM @ 2700K	up to 74 lm/W
	1,050 LM @ 3000K	
	1,103 LM @ 3500K	
	1,111 LM @ 4000K	
	1,077 LM @ 5000K	

*Based on IES results. Actual lumens may vary.*

**4"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-DLS-R-FR-4I-12W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	792 LM @ 2700K	up to 72 lm/W
	826 LM @ 3000K	
	869 LM @ 3500K	
	875 LM @ 4000K	
	840 LM @ 5000K	

*Based on IES results. Actual lumens may vary.*



Specification is subject to change without notice.







# PT-DLS-R-FR Series

4" / 6" 2-HR Fire Rated Slim Downlight with CCT Selector


(PROVIDING A REINFORCED AND HEAT RESISTANT STEEL CASING)

Portor's 2-hour fire-rated recessed downlight is an exceptional lighting solution designed to prioritize safety without compromising on aesthetics or functionality. This innovative fixture is engineered to withstand the rigors of a fire for up to two hours, making it an essential choice for commercial and residential applications where fire protection is paramount.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP	-4°F~104°F
WARRANTY	5 year limited

## DIMENSIONS

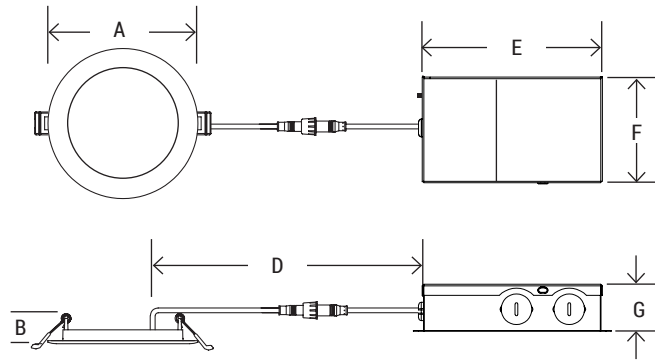

DIMENSION	PT-DLS-R-FR-6I	PT-DLS-R-FR-4I
A	7"	5"
B	1.5"	1"
CUT-OUT	6.25"	4.25"
D	12"	
E	5.4"	
F	3.1"	
G	1.3"	




Tested to comply  
with UL 263,  
ASTM E119 &  
CAN ULC S101

LED RETROFIT DOWNLIGHT WITH CCT  
AND WATTAGE SELECTOR

BAFFLE FINISH

6"  
APERTURE

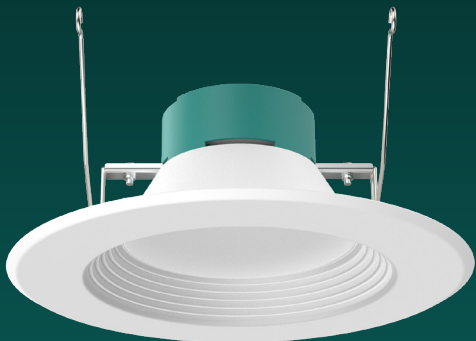

SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-B-6I-14-5C3P-2

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
7W	800 LM	up to 114 lm/W
10W	1,000 LM	
14W	1,150 LM	

Based on 4000K setting. Actual lumens may vary.

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-B-4I-10-5C3P-2

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
6W	550 LM	up to 91 lm/W
8W	700 LM	
10W	850 LM	

Based on 4000K setting. Actual lumens may vary.



DAMP  
LOCATIONS

Specification is subject to change without notice.





## PT-DLR-B-2 Series

4"/6" Baffle Retrofit Recessed Downlight with CCT and Wattage Selector

Why stock five separate color temperatures when you can have them all in one? Portor's second-generation retrofit residential downlights are revolutionizing the market! Available in 4" and 6" sizes, these fixtures feature 5-in-1 color selectable technology, allowing users to easily choose between 2700K, 3000K, 3500K, 4000K, or 5000K to suit any mood or setting.

Plus, with a three-level wattage selector, you get customizable brightness for every application—making it the perfect all-in-one lighting solution.


### TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited




E26 Adapter included  
for easy retrofitting

### DIMENSIONS

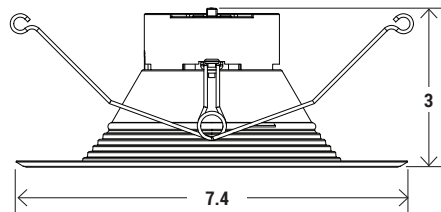

PT-DLR-B-6I-14-5C3P-2



PT-DLR-B-4I-10-5C3P-2





LED RETROFIT DOWNLIGHT WITH CCT  
AND WATTAGE SELECTOR

SMOOTH FINISH

6"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-S-6I-14-5C3P-2

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
7W	800 LM	up to 114 lm/W
10W	1,000 LM	
14W	1,150 LM	

Based on 4000K setting. Actual lumens may vary.

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-S-4I-10-5C3P-2

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
6W	550 LM	up to 91 lm/W
8W	700 LM	
10W	850 LM	

Based on 4000K setting. Actual lumens may vary.



Specification is subject to change without notice.





# PT-DLR-S-2 Series

4"/6" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Why stock five separate color temperatures when you can have them all in one? Portor's second-generation retrofit residential downlights are revolutionizing the market! Available in 4" and 6" sizes, these fixtures feature 5-in-1 color selectable technology, allowing users to easily choose between 2700K, 3000K, 3500K, 4000K, or 5000K to suit any mood or setting.

Plus, with a three-level wattage selector, you get customizable brightness for every application—making it the perfect all-in-one lighting solution.


## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited




E26 Adapter included for easy retrofitting

## DIMENSIONS

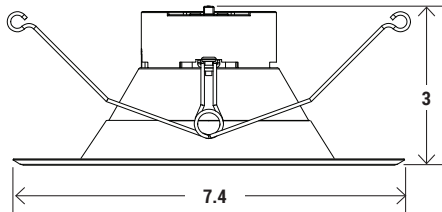

PT-DLR-S-6I-14-5C3P-2



PT-DLR-S-4I-10-5C3P-2





# NEXT GENERATION LED DOWNLIGHT WITH J-BOX

BAFFLE FINISH

6"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLJ-B-6I-15W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	932 LM @ 2700K	up to 73 lm/W
	1,004 LM @ 3000K	
	1,135 LM @ 3500K	
	1,103 LM @ 4000K	
	1,028 LM @ 5000K	

*Actual lumens may vary.*

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLJ-B-4I-10W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	689 LM @ 2700K	up to 82 lm/W
	753 LM @ 3000K	
	837 LM @ 3500K	
	820 LM @ 4000K	
	794 LM @ 5000K	

*Actual lumens may vary.*



Specification is subject to change without notice.





# PT-DLJ-B Series


4"/6" Retrofit Downlight with Junction Box  
and 5CCT Selector

Portor's recessed downlight with integrated junction box, makes installation quick and easy. No recessed housing needed or junction box required. Available in 4" and 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

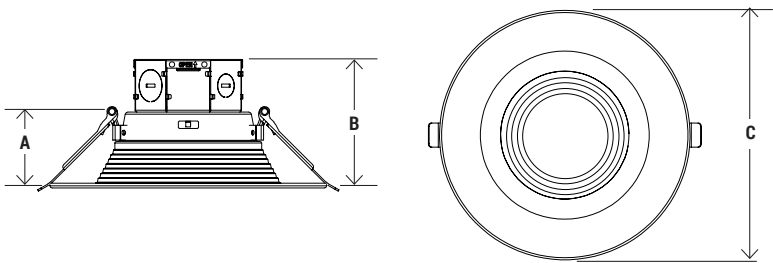

DIMENSION	PT-DLJ-B-6I	PT-DLJ-B-4I
A	2.03"	1.65"
B	3.44"	3.06"
C	7.36"	5.12"

**Direct Mounting**  
— NO RECESSED HOUSING NEEDED —  
• For Retrofit or New Construction Installation •





NEXT GENERATION LED DOWNLIGHT  
FOR CAN-LESS APPLICATION

BAFFLE FINISH

6"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-C-6I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,151 LM @ 2700K	up to 88 lm/W
	1,254 LM @ 3000K	
	1,331 LM @ 3500K	
	1,326 LM @ 4000K	
	1,198 LM @ 5000K	

Actual lumens may vary.

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-DLR-C-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	704 LM @ 2700K	up to 80 lm/W
	754 LM @ 3000K	
	806 LM @ 3500K	
	799 LM @ 4000K	
	728 LM @ 5000K	

Actual lumens may vary.



Specification is subject to change without notice.





# PT-DLR-C Series


4"/6" LED Retrofit Can-Less Downlight with Remote J-Box and 5CCT Selector

Portor's can-less recessed downlight with remote junction box, makes installation quick and easy. No recessed housing or junction box required. Available in 4" / 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

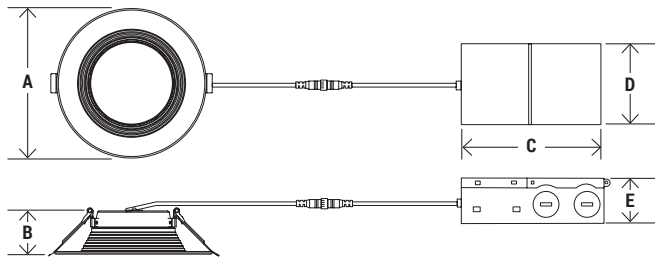

DIMENSION	PT-DLR-C-6I	PT-DLR-C-4I
A	7.3"	5.5"
B	2"	2"
C	4.7"	4.7"
D	2.7"	2.7"
E	1.3"	1.3"

**Direct Mounting**  
— NO RECESSED HOUSING NEEDED —  
• For Retrofit or New Construction Installation •





NEXT GENERATION LED DOWNLIGHT  
FOR CAN-LESS APPLICATION

BAFFLE FINISH

120V-277V



SCAN ME,  
FOR COMPLETE  
SPECS.

6"  
APERTURE



PT-DLR-C-6I-15W-5CCT-277

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,227 LM @ 2700K	up to 88 lm/W
	1,298 LM @ 3000K	
	1,331 LM @ 3500K	
	1,365 LM @ 4000K	
	1,277 LM @ 5000K	

Actual lumens may vary.

120V-277V



SCAN ME,  
FOR COMPLETE  
SPECS.

4"  
APERTURE



PT-DLR-C-4I-10W-5CCT-277

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	751 LM @ 2700K	up to 87 lm/W
	813 LM @ 3000K	
	863 LM @ 3500K	
	871 LM @ 4000K	
	828 LM @ 5000K	

Actual lumens may vary.



Specification is subject to change without notice.





## PT-DLR-C-277 Series


4"/6" LED Retrofit Can-Less Downlight with Remote J-Box and 5CCT Selector in 120-277V

Portor's can-less recessed downlight with remote junction box, makes installation quick and easy. No recessed housing or junction box required. Available in 4" / 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for wet locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
WARRANTY	5 year limited

### DIMENSIONS

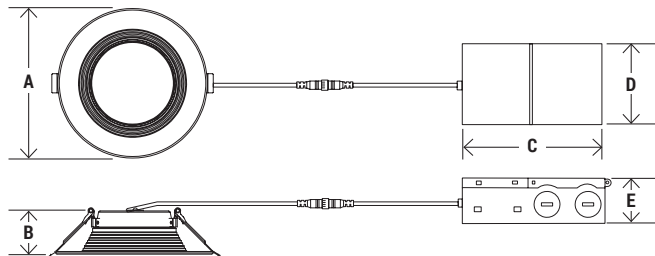

DIMENSION	PT-DLR-C-6I	PT-DLR-C-4I
A	7.3"	5.5"
B	2"	2"
C	4.7"	4.7"
D	2.7"	2.7"
E	1.3"	1.3"

**Direct Mounting**

NO RECESSED HOUSING NEEDED

\* For Retrofit or New Construction Installation \*





# NEXT GENERATION LED GIMBAL RETROFIT DOWNLIGHT



PT-DLR-G-6I-16W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
16W	1,018 LM @ 2700K	up to 74 lm/W
	1,070 LM @ 3000K	
	1,168 LM @ 3500K	
	1,193 LM @ 4000K	
	1,077 LM @ 5000K	

Actual lumens may vary.



PT-DLR-G-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	634 LM @ 2700K	up to 72 lm/W
	676 LM @ 3000K	
	708 LM @ 3500K	
	720 LM @ 4000K	
	677 LM @ 5000K	

Actual lumens may vary.



Specification is subject to change without notice.





# PT-DLR-G Series

4"/6" LED Retrofit Gimbal Downlight with 5CCT Selector

With CCT selector technology, and 60° tilting/360° rotating capability, Portor's second generation 4" / 6" gimbal retrofit kit downlights make accent, spot lighting, and wall washing so easy!

Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.


## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited




E26 Adapter included for easy retrofitting

## DIMENSIONS



PT-DLR-G-4I-10W-5CCT

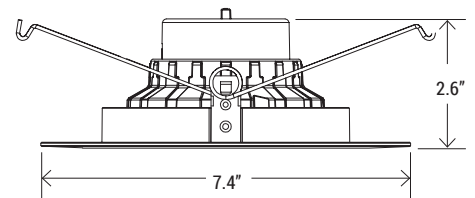

PT-DLR-G-6I-16W-5CCT





# NEXT GENERATION LED CAN-LESS GIMBAL DOWNLIGHT

**6"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLG2-R-6I-18W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
18W	1,209 LM @ 2700K	up to 81 lm/W
	1,281 LM @ 3000K	
	2,371 LM @ 3500K	
	1,466 LM @ 4000K	
	1,457 LM @ 5000K	

*Actual lumens may vary.*

**4"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLG2-R-4I-12W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	821 LM @ 2700K	up to 76 lm/W
	864 LM @ 3000K	
	898 LM @ 3500K	
	912 LM @ 4000K	
	868 LM @ 5000K	

*Actual lumens may vary.*

**3"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLG2-R-3I-8W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
8W	578 LM @ 2700K	up to 83 lm/W
	602 LM @ 3000K	
	642 LM @ 3500K	
	671 LM @ 4000K	
	628 LM @ 5000K	

*Actual lumens may vary.*



Specification is subject to change without notice.





# PT-DLG2-R Series


3"/4"/6" Round Can-less Gimbal Downlight  
with CCT Selector

With CCT selector technology, and 30° tilting/360° rotating capability, Portor's second generation 3"/4"/6" gimbal downlights make accent, spot lighting, and wall washing so easy! Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	38°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

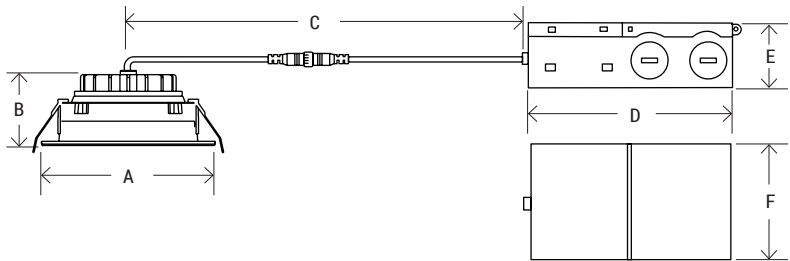

DIMENSION	PT-DLG2-R-6I	PT-DLG2-R-4I	PT-DLG2-R-3I
A	6.8"	4.92"	3.35"
B	2.2"	2"	1.81"
C	13"	13"	13"
D	3.94"		
E	1.34"		
F	2.68"		





NEXT GENERATION LED  
CAN-LESS FLOATING GIMBAL DOWNLIGHT

4"  
APERTURE



PT-DLFG2-R-4I-9W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
9W	585 LM @ 2700K	up to 75 lm/W
	600 LM @ 3000K	
	628 LM @ 3500K	
	675 LM @ 4000K	
	645 LM @ 5000K	

Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.





# PT-DLFG2-R Series

4" Round Can-less Floating Gimbal Downlight  
with CCT Selector


With CCT selector technology, and 90° tilting/360° rotating capability, Portor's second generation 4" floating gimbal downlights make accent, spot lighting, and wall washing so easy! Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	38°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

RESIDENTIAL

## DIMENSIONS

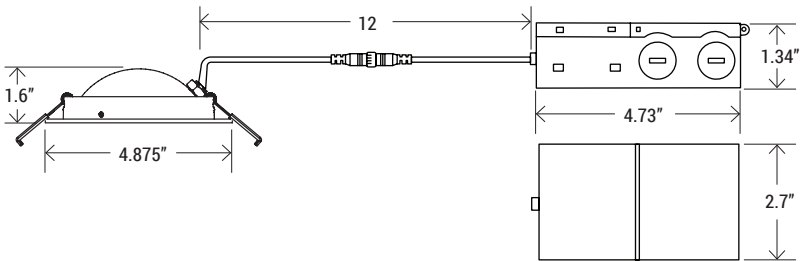



## SECOND GENERATION LED ROUND SLIM DOWNLIGHT

**8"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLS2-R-8I-18W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
18W	1,442 LM @ 2700K	up to 83 lm/W
	1,488 LM @ 3000K	
	1,504 LM @ 3500K	
	1,474 LM @ 4000K	
	1,409 LM @ 5000K	

**6"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLS2-R-6I-15W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	975 LM @ 2700K	up to 80 lm/W
	1,050 LM @ 3000K	
	1,125 LM @ 3500K	
	1,200 LM @ 4000K	
	1,125 LM @ 5000K	

**4"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-DLS2-R-4I-9W-5CCT**

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
9W	597 LM @ 2700K	up to 74 lm/W
	630 LM @ 3000K	
	660 LM @ 3500K	
	663 LM @ 4000K	
	650 LM @ 5000K	

*Based on IES results. Actual lumens may vary.*



Specification is subject to change without notice.



# PT-DLS2-R Series

4" / 6" / 8" Round LED Slim Downlight with CCT Selector

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 4"/6"/8" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.


Available in

**120V-277V**  
VOLTAGE

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

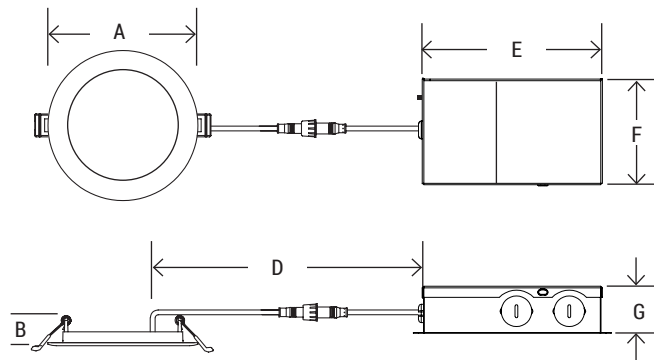

DIMENSION	PT-DLS2-R-8I	PT-DLS2-R-6I	PT-DLS2-R-4I
A	8.82"	7.125"	5"
B	1"	1"	1"
CUT-OUT	8"	6.25"	4.25"
D		12"	
E		4.75"	
F		2.5"	
G		1.3"	





## SECOND GENERATION LED SQUARE SLIM DOWNLIGHT

**6"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DLS2-S-6I-12W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	921 LM @ 2700K	up to 85 lm/W
	956 LM @ 3000K	
	979 LM @ 3500K	
	979 LM @ 4000K	
	1,163 LM @ 5000K	

*Actual lumens may vary.*

**4"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DLS2-S-4I-9W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
9W	597 LM @ 2700K	up to 74 lm/W
	630 LM @ 3000K	
	660 LM @ 3500K	
	663 LM @ 4000K	
	650 LM @ 5000K	

*Actual lumens may vary.*



Specification is subject to change without notice.





# PT-DLS2-S Series


4" / 6" Square LED Slim Downlight with CCT Selector

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 4"/6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

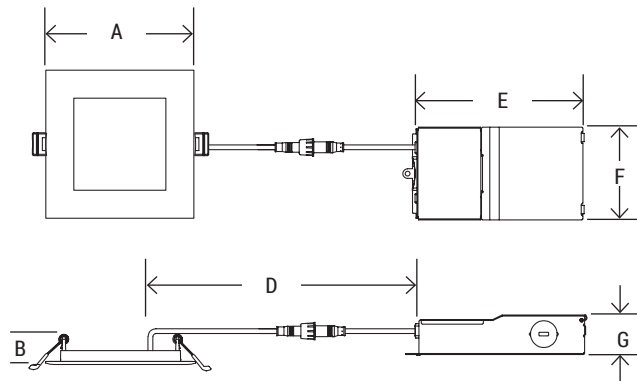

DIMENSION	PT-DLS2-S-6I	PT-DLS2-S-4I
A	6.875"	4.875"
B	1"	1"
CUT-OUT	6.25"	4.25"
D	12"	
E	5.625"	
F	3"	
G	1.25"	





## SECOND GENERATION LED ROUND SLIM DOWNLIGHT

BAFFLE FINISH

6"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DLSB2-R-6I-12W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	957 LM @ 2700K	up to 84 lm/W
	990 LM @ 3000K	
	999 LM @ 3500K	
	1,010 LM @ 4000K	
	952 LM @ 5000K	

Actual lumens may vary.

4"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DLSB2-R-4I-9W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
9W	619 LM @ 2700K	up to 77 lm/W
	666 LM @ 3000K	
	699 LM @ 3500K	
	701 LM @ 4000K	
	661 LM @ 5000K	

Actual lumens may vary.



Specification is subject to change without notice.







# PT-DLSB2-R Series


4" / 6" Round Baffle LED Slim Downlight with CCT Selector

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round baffle profile residential downlights are taking the market by storm! Available in 4"/6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

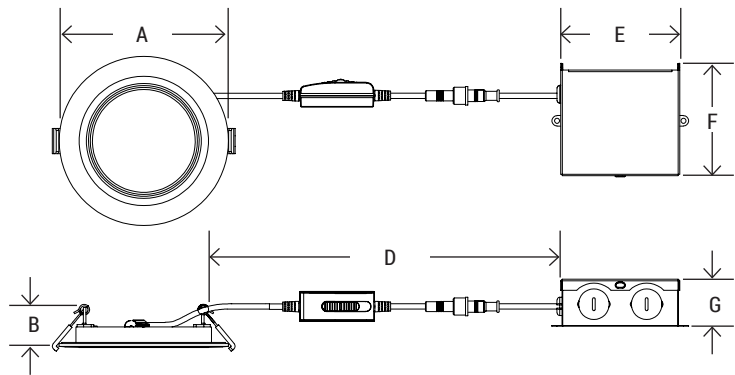

DIMENSION	PT-DLSB2-R-6I	PT-DLSB2-R-4I
A	6.875"	5"
B	1.25"	1.25"
CUT-OUT	6.25"	4.25"
D	15.75"	
E	3.5"	
F	3.4"	
G	1.4"	





# RUND SURFACE MOUNT DOWNLIGHT

13"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM2-R-13I-24W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
24W	2,133 LM @ 2700K	up to 99 lm/W
	2,135 LM @ 3000K	
	2,191 LM @ 3500K	
	2,276 LM @ 4000K	
	2,323 LM @ 5000K	

12"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM-R-12I-22W-3CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
22W	1,481 LM @ 3000K	up to 71 lm/W
	1,674 LM @ 4000K	
	1,564 LM @ 5000K	

11"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM2-R-11I-22W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
22W	2,324 LM @ 2700K	up to 105 lm/W
	2,132 LM @ 3000K	
	2,233 LM @ 3500K	
	2,329 LM @ 4000K	
	2,354 LM @ 5000K	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.



## PT-DLSM2-R Series

Surface Mount Round Downlight  
with CCT Selector


Portor's second generation surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.

### TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
POWER FACTOR	>0.9
WARRANTY	5 year limited

### DIMENSIONS

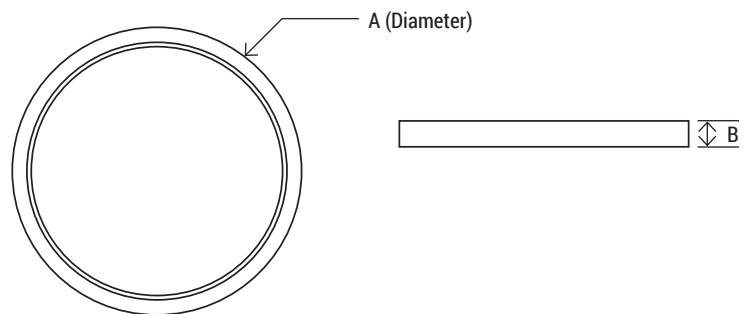

MODEL #	A	B
PT-DLSM2-R-11I	11"	.98"
PT-DLSM2-R-12I	12"	1"
PT-DLSM2-R-13I	13"	.98"

ROUND  
**SURFACE**  
MOUNT DOWNLIGHT





# RUND SURFACE MOUNT DOWNLIGHT

9"  
APERTURE



## PT-DLSM2-R-9I-18W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
18W	994 LM @ 2700K	up to 65 lm/W
	1,105 LM @ 3000K	
	1,177 LM @ 3500K	
	1,183 LM @ 4000K	
	1,084 LM @ 5000K	

7"  
APERTURE



## PT-DLSM2-R-7I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	897 LM @ 2700K	up to 71 lm/W
	1,004 LM @ 3000K	
	1,056 LM @ 3500K	
	1,066 LM @ 4000K	
	1,007 LM @ 5000K	

5"  
APERTURE



## PT-DLSM2-R-5I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	576 LM @ 2700K	up to 63 lm/W
	613 LM @ 3000K	
	631 LM @ 3500K	
	634 LM @ 4000K	
	592 LM @ 5000K	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.



## PT-DLSM2-R Series

Surface Mount Round Downlight  
with CCT Selector


Portor's second generation surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.

### TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
POWER FACTOR	>0.9
WARRANTY	5 year limited

### DIMENSIONS

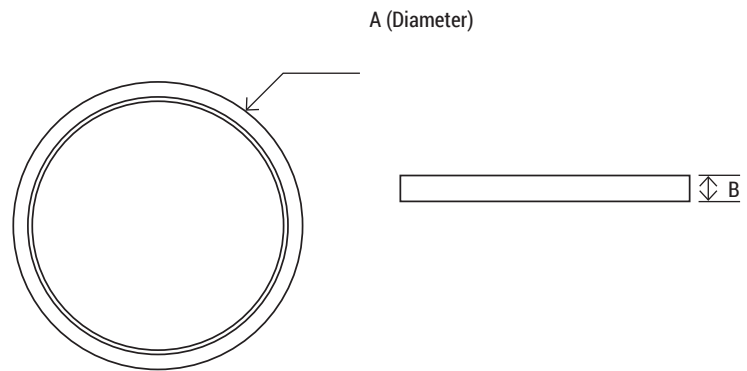

MODEL #	A	B
PT-DLSM2-R-5I	5.5"	.5"
PT-DLSM2-R-7I	7.5"	.5"
PT-DLSM2-R-9I	8.86"	.5"

ROUND  
**SURFACE**  
MOUNT DOWNLIGHT





# SURE SURFACE MOUNT DOWNLIGHT

12"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM2-S-12I-22W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
22W	1,317 LM @ 2700K	up to 67 lm/W
	1,386 LM @ 3000K	
	1,469 LM @ 3500K	
	1,492 LM @ 4000K	
	1,420 LM @ 5000K	

9"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM2-S-9I-18W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
18W	1,144 LM @ 2700K	up to 72 lm/W
	1,211 LM @ 3000K	
	1,283 LM @ 3500K	
	1,296 LM @ 4000K	
	1,258 LM @ 5000K	

7"  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-DLSM2-S-7I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	868 LM @ 2700K	up to 67 lm/W
	914 LM @ 3000K	
	999 LM @ 3500K	
	1,012 LM @ 4000K	
	956 LM @ 5000K	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.



## PT-DLSM2-S Series

Surface Mount Square Downlight  
with CCT Selector


Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.

### TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
POWER FACTOR	>0.9
WARRANTY	5 year limited

### DIMENSIONS

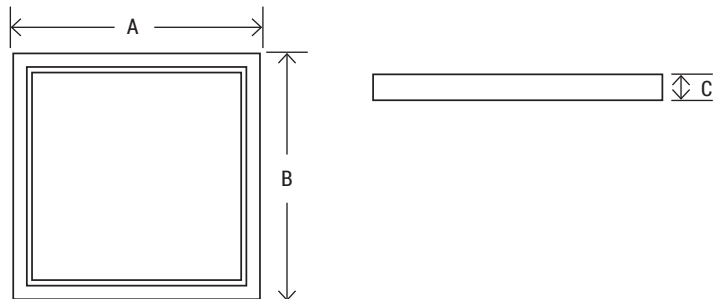

MODEL #	A	C	D
PT-DLSM-S-7I	6.3"	6.3"	.67"
PT-DLSM-S-9I	9"	9"	.67"
PT-DLSM-S-12I	12"	12"	1"

SURFACE  
**SLIFACE**  
MOUNT DOWNLIGHT

5CCT  
**<SELECTOR>**



## SECOND GENERATION LED DISK DOWNLIGHT

**8"**  
APERTURE



### PT-DDL2-8I-18W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
18W	1,218 LM @ 2700K	up to 75 lm/W
	1,247 LM @ 3000K	
	1,303 LM @ 3500K	
	1,356 LM @ 4000K	
	1,298 LM @ 5000K	

**6"**  
APERTURE



### PT-DDL2-6I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	923 LM @ 2700K	up to 75 lm/W
	970 LM @ 3000K	
	1,098 LM @ 3500K	
	1,126 LM @ 4000K	
	1,023 LM @ 5000K	

**4"**  
APERTURE



### PT-DDL2-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	540 LM @ 2700K	up to 60 lm/W
	591 LM @ 3000K	
	614 LM @ 3500K	
	617 LM @ 4000K	
	586 LM @ 5000K	

*Based on IES results. Actual lumens may vary.*



Specification is subject to change without notice.



# PT-DDL2 Series

4"/6"/8" Disk Downlight with CCT Selector


Portor's second generation disk downlight are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DDL2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited ceiling space.

## TECHNICAL SPECIFICATION

VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for wet locations
DIMMABLE	Triac dimming
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
POWER FACTOR	>0.9
WARRANTY	5 year limited

## DIMENSIONS

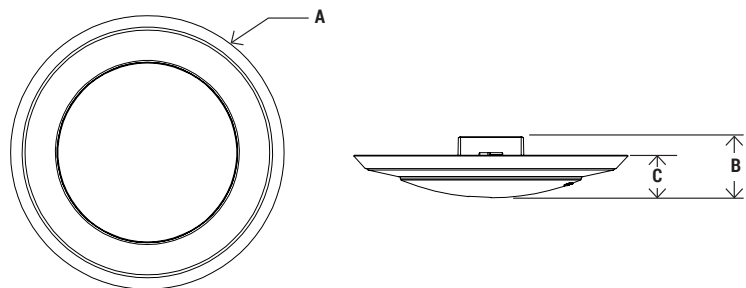

DIMENSION	PT-DDL2-8I-18W	PT-DDL2-6I-15W	PT-DDL2-4I-10W
A	9.45"	7.2"	5.8"
B	1.49"	1.36"	1.3"
C	1.14"	.9"	.9"





## CLOSET RATED MOTION SENSOR DOWNLIGHT

**6"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DMS-6I-15W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
15W	700 LM @ 2700K	up to 62 lm/W
	752 LM @ 3000K	
	940 LM @ 3500K	
	959 LM @ 4000K	
	871 LM @ 5000K	

Based on IES results. Actual lumens may vary.

**4"**  
APERTURE



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-DMS-4I-10W-5CCT

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	552 LM @ 2700K	up to 64 lm/W
	556 LM @ 3000K	
	603 LM @ 3500K	
	617 LM @ 4000K	
	590 LM @ 5000K	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.





# PT-DMS Series

## 4"/6" LED Closet Light with Motion Sensor and CCT Selector


Portor's Closet Rated downlights with Motion Sensor are an ideal solution for closet application. Available in multiple apertures, the DMS Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, apartments, and any other small areas with limited space.

### TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

### DIMENSIONS

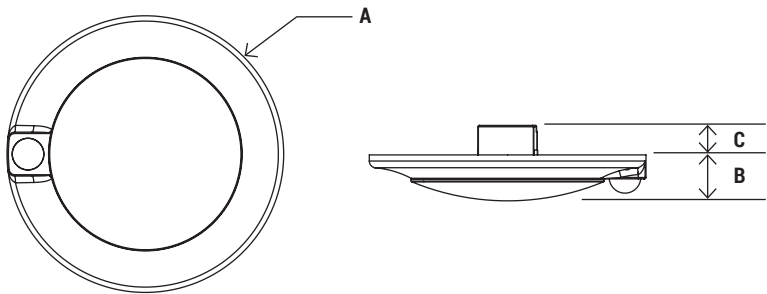

DIMENSION	PT-DMS-6I-15W	PT-DMS-4I-10W
A	8"	6.9"
B	1.4"	1.1"
C	.7"	.7"





LED RETROFIT  
**COMMERCIAL**  
GRADE DOWNLIGHT

BAFFLE FINISH

**10"**  
APERTURE



**PT-CDL2-10I-5C3P**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
22W	2,005	up to 90 lm/W
30W	2,583	
38W	3,199	

**8"**  
APERTURE



**PT-CDL2-8I-5C3P**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
17W	1,615	up to 110 lm/W
24W	2,640	
30W	3,300	

**6"**  
APERTURE



**PT-CDL2-6I-5C3P**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
12W	1,200	up to 100 lm/W
17W	1,700	
22W	2,200	

**4"**  
APERTURE



**PT-CDL2-4I-5C3P**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
6W	747	up to 111 lm/W
9W	1,014	
12W	1,285	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.



## PT-CDL2 Series

4" / 6" / 8" / 10" Retrofit Recessed Commercial Grade Downlight with CCT and Wattage Selector

Portor's second generation commercial grade recessed downlight is wattage and color tunable, which can be programmed with a CCT of 2700K, 3000K, 3500K, 4000K, or 5000K, eliminating the need to stock multiple color temperatures.


Ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for wet locations
DIMMABLE	*0-10V, 5-100% smooth dimming
LIFESPAN	50,000 hrs @ L70 lifetime
POWER FACTOR	>0.9
WARRANTY	5 year limited

*\*Must use 0-10v dimming wire. Not compatible for line voltage dimming.*

### DIMENSIONS

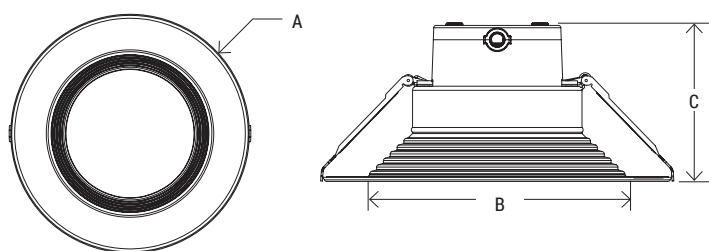

DIMENSION	PT-CDL2-10I	PT-CDL2-8I	PT-CDL2-6I	PT-CDL2-4I
A	11.37"	10"	8.4"	5.12"
B	8.66"	5.1"	4.7"	3.3"
C	5.23"	4.5"	4.17"	3.7"
CUT-OUT	8.875"-10"	6"-7.5"	5.5"-6.5"	4"-4.3"

**Direct Mounting**  
NO RECESSED HOUSING NEEDED  
FOR RETROFIT OR NEW CONSTRUCTION INSTALLATION  
20" WHIP INCLUDED



**WATTAGE**  
SELECTOR





**4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-LHTL-400-2C3P**

WATTAGE	DELIVERED LUMENS	EFFICACY
270W	41,708	up to 159 lm/W
340W	50,979	
400W	58,668	

*Based on IES results @ 5000K.*

**3'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-LHTL-270-2C3P**

WATTAGE	DELIVERED LUMENS	EFFICACY
200W	30,842	up to 159 lm/W
230W	34,838	
270W	39,622	

*Based on IES results @ 5000K.*

**2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-LHTL-185-2C3P**

WATTAGE	DELIVERED LUMENS	EFFICACY
135W	21,279	up to 164 lm/W
155W	23,998	
185W	28,066	

*Based on IES results @ 5000K.*



Specification is subject to change without notice.





# PT-LHTL-2C3P Series


2' / 3' / 4' LED Linear High Bay Twin Lens with CCT and Wattage Selector

Portor's new Linear High Bay Lighting with Twin Lens – the smart choice for efficient illumination without compromise. Designed to provide exceptional performance at a cost-effective value, these high bays deliver bright and even lighting for your industrial and commercial spaces. Illuminate your workspace with energy-saving brilliance, meeting your lighting needs while being budget-conscious.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80+
CCT	4000K   5000K
IP RATING	Suitable for damp locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-40°F ~ 122°F
WARRANTY	5 year limited

## DIMENSIONS

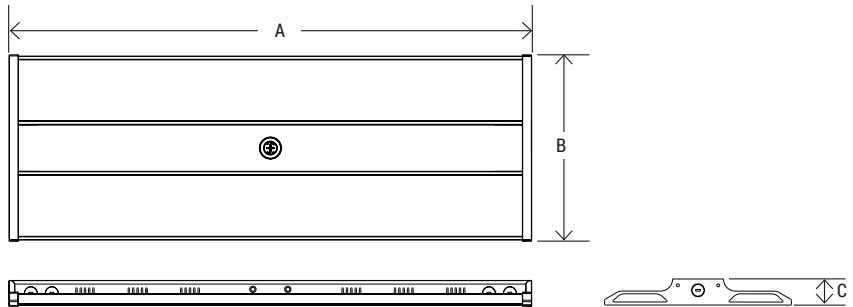


DIMENSION	PT-LHTL-185-2C3P	PT-LHTL-270-2C3P	PT-LHTL-400-2C3P
A	22.8"	31.1"	44.1"
B	10.2"		
C	1.8"		





## LINEAR HIGH BAY

4'

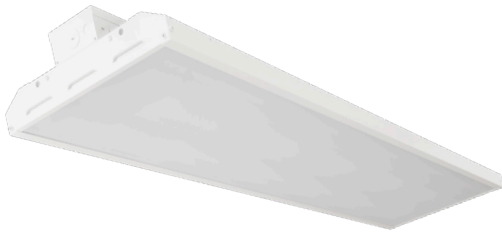

### PT-LHB-170W-2CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
170W	22,950 @ 4000K	137 lm/W
	23,302 @ 5000K	

*Actual lumens may vary.*



SCAN ME, FOR  
COMPLETE SPECS.

### PT-LHB-210W-2CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
210W	28,350 @ 4000K	137 lm/W
	27,924 @ 5000K	

*Actual lumens may vary.*



SCAN ME, FOR  
COMPLETE SPECS.

### PT-LHB-300W-2CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
300W	40,500 @ 4000K	137 lm/W
	40,310 @ 5000K	

*Actual lumens may vary.*



SCAN ME, FOR  
COMPLETE SPECS.



Specification is subject to change without notice.





# PT-LHB Series


## 4' Linear High Bay with CCT Selector

Portor's Next Generation LED Linear High Bay provides high performance efficient and quality light output. Perfect for high ceiling commercial application. Portor can also provide in-house installation solution for accessories such as for Motion Sensor or Emergency Battery Back-up. Saving additional labor cost and installation lead time.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	82
CCT	4000K   5000K
IP RATING	Suitable for damp locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

### DIMENSIONS

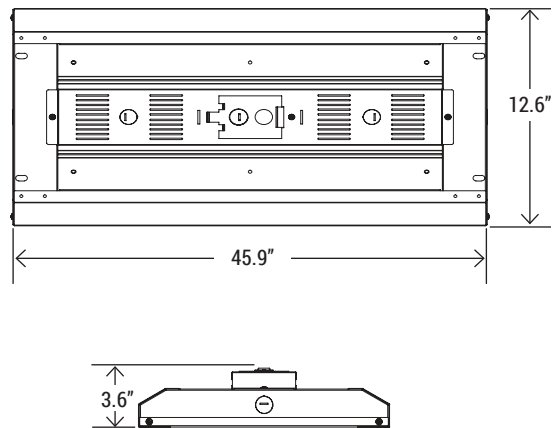



## LINEAR HIGH BAY

2'



### PT-LHB-105W-2CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
105W	14,175 @ 4000K	141 lm/W
	14,176 @ 5000K	

*Actual lumens may vary.*



SCAN ME, FOR  
COMPLETE SPECS.

### PT-LHB-155W-2CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
155W	20,925 @ 4000K	139 lm/W
	20,443 @ 5000K	

*Actual lumens may vary.*



SCAN ME, FOR  
COMPLETE SPECS.



Specification is subject to change without notice.





# PT-LHB Series



## 2' Linear High Bay with CCT Selector

Portor's LED Linear High Bay provides high performance efficient and quality light output. Perfect for high ceiling commercial application. Portor can also provide in-house installation solution for accessories such as for Motion Sensor or Emergency Battery Back-up. Saving additional labor cost and installation lead time.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	82
CCT	4000K   5000K
IP RATING	Suitable for damp locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

### DIMENSIONS

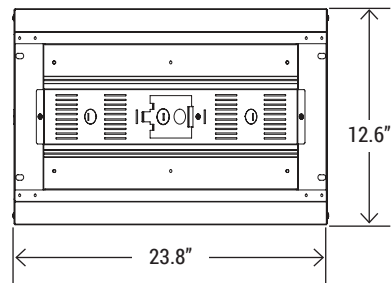



## NEXT GENERATION HIGH OUTPUT ROUND HIGH BAY

**13"**  
DIAMETER



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-RHB-13D-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
180W	28,218	up to 162 lm/W
200W	31,094	
240W	37,943	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

**11"**  
DIAMETER



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-RHB-11D-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
100W	15,848	up to 160 lm/W
120W	18,484	
150W	22,314	

*Based on 4000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.

A PORTOR INDUSTRY BRAND







## PT-RHB Series


High Output Round High Bay with CCT and Wattage Selector

The RHB High Output Round High Bay fixture is efficient, durable and designed to withstand harsh conditions with its remarkable heat dissipation, dust-tight body and resistance to water. RHB is wattage and color selector, and can be programmed with a CCT of 3500K, 4000K or 5000K, eliminating the need to stock multiple color temperatures.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
IP RATING	Suitable for wet locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤20%
FINISH	Black, White
WARRANTY	5 year limited

### DIMENSIONS

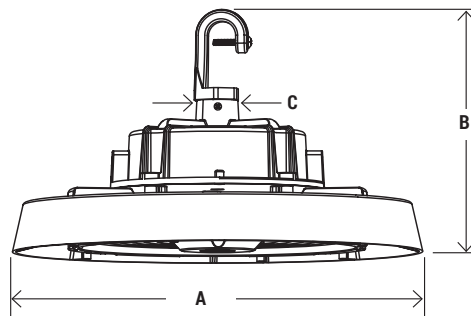

DIMENSION	PT-RHB-11D-3CP	PT-RHB-13D-3CP
A	13.4"	11"
B	6.4"	6.5"
C (THREAD SIZE)	.5"	





## NEXT GENERATION ECONOMY ROUND HIGH BAY

**13"**  
DIAMETER



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-RHBE-240W-50K**

WATTAGE	DELIVERED LUMENS	EFFICACY
240W	34,800	up to 145 lm/W

*Based on 5000K, 80 CRI. Actual lumens may vary.*

**10"**  
DIAMETER



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-RHBE-150W-50K**

WATTAGE	DELIVERED LUMENS	EFFICACY
150W	21,750	up to 145 lm/W

*Based on 5000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.

A PORTOR INDUSTRY BRAND







# PT-RHBE Series


## Economy Round High Bay

This economically designed round high bay ensures both functionality and versatility, catering to your specific lighting needs with ease. Upgrade your lighting experience with a product that combines innovation, efficiency, and adaptability for a brighter environment.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	5000K
IP RATING	Suitable for wet locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤20%
FINISH	Black
WARRANTY	5 year limited

### DIMENSIONS

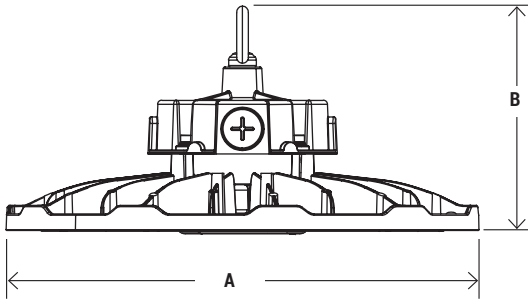

DIMENSION	PT-RHBE-240W-50K	PT-RHBE-150W-50K
A	13.4"	10.24"
B	6.5"	6"





## HIGH OUTPUT CENTER BASKET TROFFER

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-HO-24-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
42W	5,643	up to 148 lm/W
54W	7,260	
65W	8,817	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-TRO-HO-22-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	3,991	up to 146 lm/W
35W	4,594	
40W	5,162	

*Based on 4000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.





# PT-TRO-HO Series

2' x 4' / 2' x 2' High Output Center Basket Troffer with CCT and Wattage Selector


Portor's TRO-HO is High-Output luminaire with field-adjustable, and can be programmed with a CCT of 3500K, 4000K, or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for office spaces , walkways, schools/campuses, shopping centers, hospitality and health care industry.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	120°
DIMMABLE	0-10V Continuous Dimming (10%-100%)
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

## DIMENSIONS

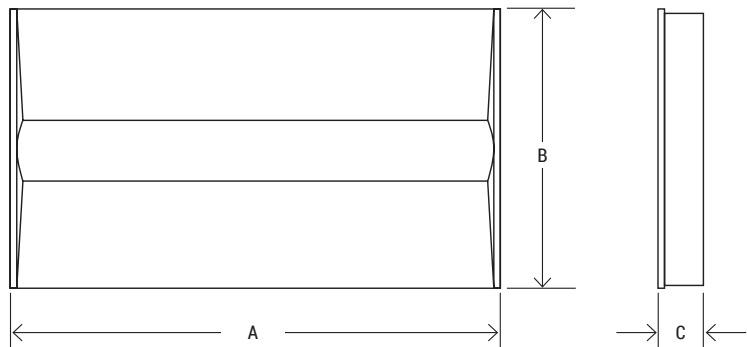

DIMENSION	PT-TRO-HO-24	PT-TRO-HO-22
A	47.8"	23.7"
B	23.7"	23.7"
C	2.1"	2.1"





## SECOND GENERATION CENTER BASKET TROFFER

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-TR02-24-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	4,675	up to 145 lm/W
38W	5,208	
45W	6,189	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-TR02-22-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,511	up to 145 lm/W
30W	4,150	
35W	4,753	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

**1'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-TR02-14-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,511	up to 145 lm/W
30W	4,150	
35W	4,753	

*Based on 4000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.



# PT-TR02 Series

2' x 4' / 2' x 2' / 1' x 4' Center Basket Troffer with CCT and Wattage Selector


Portor's TR02 is field-adjustable, and can be programmed with a CCT of 3500K, 4000K, or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for office spaces , walkways, schools/campuses, shopping centers, hospitality and health care industry.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	120°
DIMMABLE	0-10V Continuous Dimming (10%-100%)
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

## DIMENSIONS

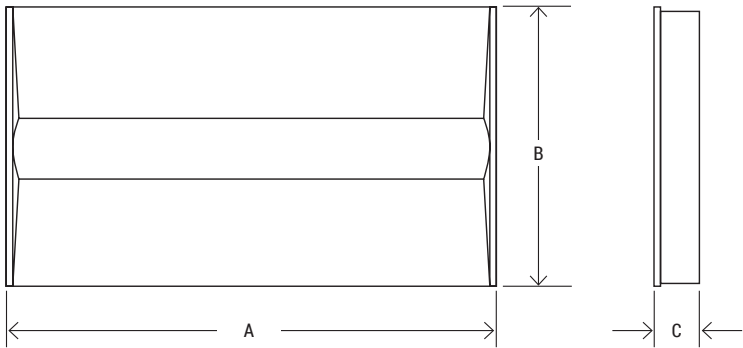

DIMENSION	PT-TR02-24	PT-TR02-22	PT-TR02-14
A	47.8"	23.75"	47.8"
B	23.75"	23.75"	11.75"
C	2.13"	2.13"	2"





## BACK-LIT FLAT PANEL

**2'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP8-24-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	3,300	110 lm/W
40W	4,400	
50W	5,500	

Based on 3500K, 80 CRI. Actual lumens may vary.

**2'x2'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP8-22-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	2,750	110 lm/W
30W	3,300	
40W	4,400	

Based on 3500K, 80 CRI. Actual lumens may vary.

**1'x4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-BLP8-14-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	2,975	up to 119 lm/W
30W	3,480	
40W	4,400	

Based on 3500K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.



## PT-BLP8 Series

2' x 4' / 2' x 2' / 1' x 4' Back-lit Flat Panel Luminaire  
with CCT and Wattage Selector


Portor's 8th Generation BLP series produce industry-leading performance with deep energy savings and continuous dimming. The compact, slick profile produces uniform and glare free lumen output.

Perfect application for retail stores, schools, offices, markets and restaurant.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
IP RATING	Suitable for damp locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited

### DIMENSIONS

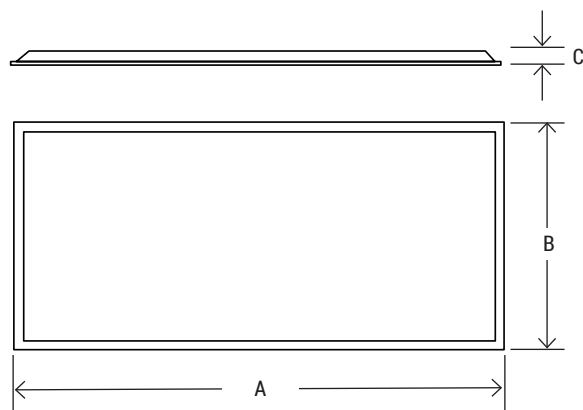

DIMENSION	PT-BLP8-24	PT-BLP8-22	PT-BLP8-14
A	47.8"	23.7"	47.8"
B	23.7"	23.7"	11.8"
C	1.5"	1.5"	1.5"





## NEXT GENERATION VAPOR-SEAL LUMINAIRE

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-VS-WD-4F-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
150W	24,597	up to 150 lm/W
175W	27,706	
200W	30,064	

Based on 4000K, 80 CRI. Actual lumens may vary.

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-VS-MO-4F-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	4,729	up to 153 lm/W
40W	6,126	
50W	7,318	

Based on 4000K, 80 CRI. Actual lumens may vary.

8'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-VS-MO-8F-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
70W	11,739	up to 162 lm/W
80W	13,127	
90W	14,626	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.



## PT-VS Series

4' Wide (**WD**) and 4' / 8' Modest (**MO**) Style Vapor Seal Luminaire with CCT and Wattage Selector


The Portor Vapor-Seal series offers an industry-leading performance with deep energy savings and continuous dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Easy installation for both surface-mount and suspended mount.

### TECHNICAL SPECIFICATION


VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	110°
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤10%
IP RATING	IP66
WARRANTY	5 year limited

### DIMENSIONS

PT-VS-WD-4F

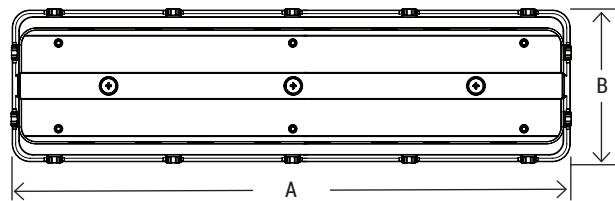

PT-VS-MO-4F/8F

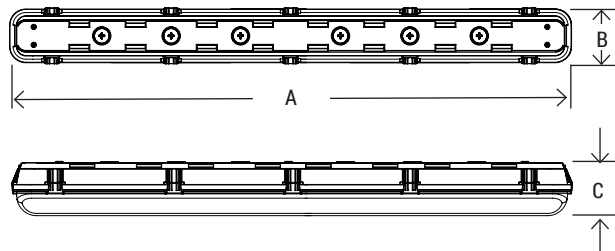

DIMENSION	PT-VS-WD-4F	PT-VS-MO-4F	PT-VS-MO-8F
A	49.21"	49.21"	98.43"
B	12.28"	4.53"	5.32"
C	4.25"	3.74"	3.74"





## NEXT GENERATION VAPORTIGHT LUMINAIRE

8'



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-VT2-8F-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
44W	6,336	up to 143 lm/W
65W	9,035	
75W	10,125	

*Based on 5000K, 80 CRI. Actual lumens may vary.*

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-VT2-4F-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	4,896	up to 143 lm/W
38W	5,358	
45W	6,075	

*Based on 5000K, 80 CRI. Actual lumens may vary.*

2'



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-VT2-2F-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	2,145	up to 143 lm/W
20W	2,780	
25W	3,375	

*Based on 5000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.



## PT-VT2 Series


2' / 4' / 8' Vaportight Luminaire with CCT and Wattage Selector

Portor's VT2 series offers an industry-leading performance with deep energy savings and continuous dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Suitable for damp and wet location. The compact, slick profile produces uniform and glare free lumen output. Easy installation for both surface-mount and suspended mount.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K/4000K/5000K
BEAM ANGLE	110°
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
THD	≤10%
IP RATING	IP65
WARRANTY	5 year limited

### DIMENSIONS

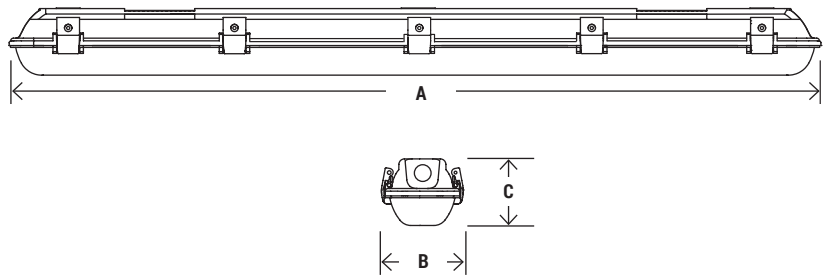

DIMENSION	PT-VT2-8F	PT-VT2-4F	PT-VT2-2F
A	94.5"	47.2"	23.6"
B	3.8"	3.8"	3.8"
C	3.1"	3.1"	3.1"





## HIGH OUTPUT LINEAR STRIP LIGHT

8'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-LS-H0-8F-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
112W	14,000	up to 126 lm/W
126W	16,000	
142W	18,000	

*Based on 4000K, 80 CRI. Actual lumens may vary.*

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-LS-H0-4F-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
44W	6,500	up to 142 lm/W
60W	8,500	
80W	11,000	

*Based on 4000K, 80 CRI. Actual lumens may vary.*



Specification is subject to change without notice.





# PT-LS-HO Series

4' / 8' High Output Linear Strip Luminaire with CCT and Wattage Selector


The LS-HO series is a slim, light weight and energy efficient luminaire that is equipped with 0-10V dimming capability and a field-adjustable CCT and wattage selector.

The fixture includes standard surface mounting kit excellent for utility applications such as parking garage, warehouse, hallway, storage facility, restrooms and stairwell.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

## DIMENSIONS

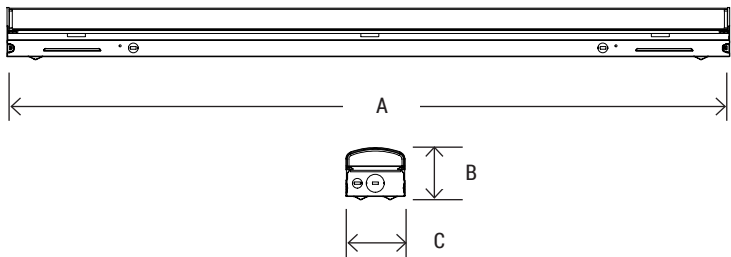

DIMENSION	PT-LS-HO-8F	PT-LS-HO-4F
A	94.2"	47.3"
B	2.52"	2.52"
C	2.83"	2.83"





## LINEAR STRIP LIGHT

8'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-LS1-8FT-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
55W	7,535	up to 132 lm/W
60W	8,040	
65W	8,515	

Based on 4000K, 80 CRI. Actual lumens may vary.

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-LS1-4FT-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,425	up to 132 lm/W
30W	4,020	
40W	5,240	

Based on 4000K, 80 CRI. Actual lumens may vary.

2'



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-LS1-2FT-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	2,173	up to 142 lm/W
20W	2,876	
25W	3,561	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.



# PT-LS1 Series

2' / 4' / 8' Linear Strip Luminaire with CCT and Wattage Selector


The LS1 series is a slim, light weight and energy efficient luminaire that is equipped with 0-10V dimming capability and a field-adjustable CCT and wattage selector.

The fixture includes standard surface mounting kit excellent for utility applications such as parking garage, warehouse, hallway, storage facility, restrooms and stairwell.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

## DIMENSIONS

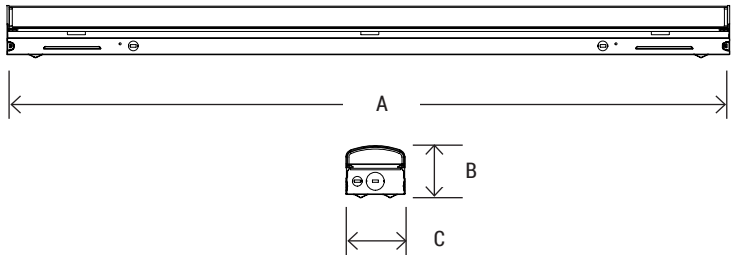

DIMENSION	PT-LS1-8FT	PT-LS1-4FT	PT-LS1-2FT
A	94.2"	47.3"	22.2"
B	2.52"	2.52"	2.52"
C	2.83"	2.83"	2.83"





## WRAP AROUND LUMINAIRE

Arc / Modern / Slim Style

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

NEW MODEL

**PT-WAA-4F9I-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	4,200	up to 140 lm/W
40W	5,600	
50W	7,000	

Based on 4000K, 80 CRI. Actual lumens may vary.

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

NEW MODEL

**PT-WAM-4F9I-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	3,450	up to 115 lm/W
40W	4,600	
50W	5,750	

Based on 4000K, 80 CRI. Actual lumens may vary.

4'



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-WAS-4F5I-3CP**

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	3,450	up to 115 lm/W
20W	4,600	
25W	5,750	

Based on 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.

# PT-WAA/WAM/WAS Series

4' Arc / Modern / Slim Style Wraparound Luminaire with CCT and Wattage Selector

Portor's Wraparound series is designed to save energy and meet lost light regress requirements. Our wraparound is wattage adjustable (30W/40W/50W) and color tunable (35K/40K/50K).


Ideal use for offices, hallways, stairwells, bathrooms and conference rooms.

## TECHNICAL SPECIFICATION


VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
DIMMABLE	0-10V Continuous Dimming (10%-100%)
SENSOR	Photocell ready (Screw-in type)
IP RATING	Suitable for dry locations
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

## DIMENSIONS


### PT-WAA-4F9I-3CP

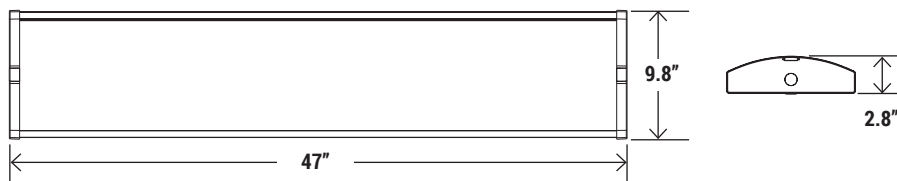

### PT-WAM-4F9I-3CP

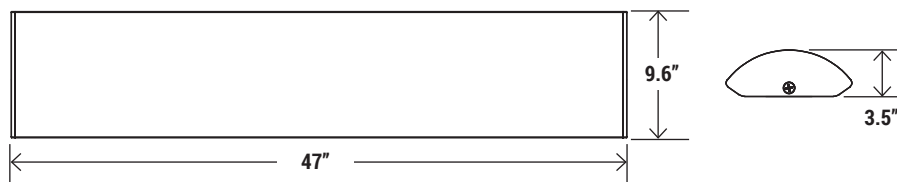

### PT-WAS-4F5I-3CP

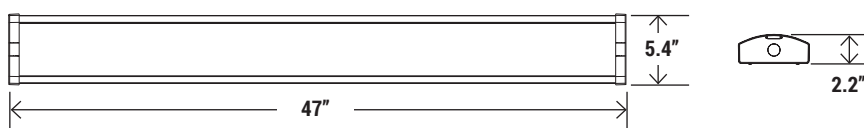



# WRAP AROUND LUMINAIRE

Slim Profile (7" width) (9" width)

Available  
in  
**4'**



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-WA2-4F7I-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	4,080	up to 136 lm/W
35W	4,655	
40W	5,200	

Based on 5000K, 80 CRI. Actual lumens may vary.

Available  
in  
**4'**




SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-WAFA-4F9I-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
40W	4,050 @ 3500K	up to 130 lm/W
	5,200 @ 4000K	
	5,280 @ 5000K	

Based on 40W, 80 CRI. Actual lumens may vary.

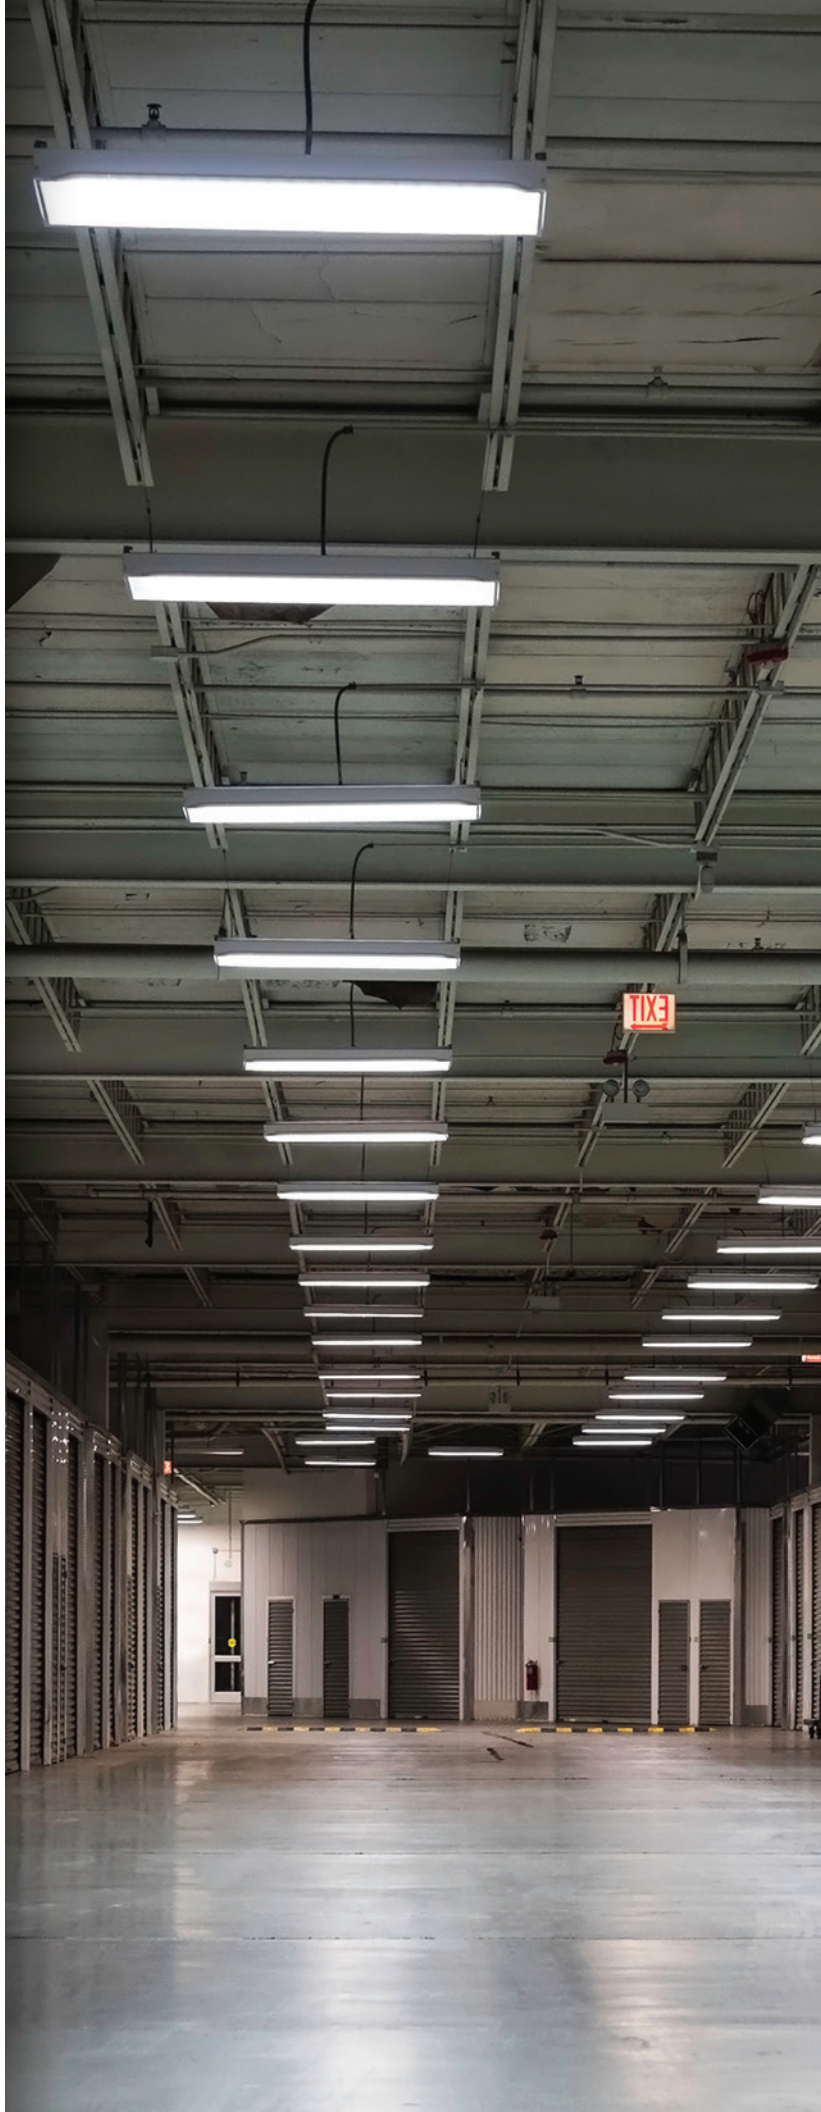

Specification is subject to change without notice.



# PT-WA2/WAFA Series

4' LED Eco-Slim Wraparound Luminaire with CCT and Wattage Selector


Portor's Wraparound series is designed to save energy and meet lost light regress requirements. Our WA2 series is wattage adjustable (30W/35W/40W) and color tunable (35K/40K/50K), while the WAFA series is 40W and color tunable (35K/40K/50K)

Ideal use for offices, hallways, stairwells, bathrooms and conference rooms.

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
DIMMABLE	0-10V Continuous Dimming (10%-100%)
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
THD	≤10%
WARRANTY	5 year limited

## DIMENSIONS

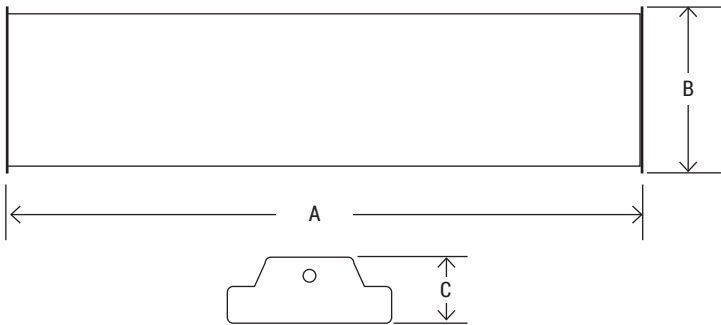

DIMENSION	PT-WA2-4F7I	PT-WAFA-4F9I
A	47.7"	47.7"
B	7.1"	9"
C	2.8"	2.8"





# STAIRWELL LIGHTING

Pre-installed Motion Sensor



PT-STL-4F-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
35W	4,445 @ 3500K	up to 129 lm/W
	4,480 @ 4000K	
	4,515 @ 5000K	

WATTAGE	DELIVERED LUMENS	EFFICACY
45W	5,580 @ 3500K	up to 126 lm/W
	5,625 @ 4000K	
	5,670 @ 5000K	

WATTAGE	DELIVERED LUMENS	EFFICACY
55W	6,655 @ 3500K	up to 123 lm/W
	6,710 @ 4000K	
	6,765 @ 5000K	



SCAN ME,  
FOR COMPLETE SPECS.



Specification is subject to change without notice.





## PT-STL Series

### 4' LED Stairwell Luminaire with CCT and Wattage Selector


The Stairwell series is a slim, light weight and energy efficient luminaire that is equipped with 0-10V dimming capability and a field-adjustable wattage selector.

The fixture includes standard surface mounting kit, excellent for utility applications such as parking garages, warehouses, hallways, storage facilities, restrooms, and stairwells.

#### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	3500K   4000K   5000K
BEAM ANGLE	120°
DIMMABLE	0-10V dimmable
IP RATING	Suitable for damp locations
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 122°F
STORAGE TEMPERATURE	-40°F ~ 158°F
THD	≤10%
WARRANTY	5 year limited

#### DIMENSIONS

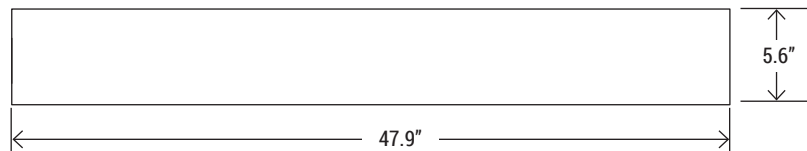



## LED CORN BULB



SHOCK AND VIBRATION  
RESISTANT



SHATTER-PROOF  
DESIGN



SUITABLE FOR FULLY  
ENCLOSED FIXTURES



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-CBL3-45W-50K**


WATTAGE	DELIVERED LUMENS	EFFICACY
45W	6,975 @ 5000K	up to 155 lm/W



SCAN ME,  
FOR COMPLETE  
SPECS.

**PT-CBL3-36W-50K**

WATTAGE	DELIVERED LUMENS	EFFICACY
36W	5,580 @ 5000K	up to 155 lm/W

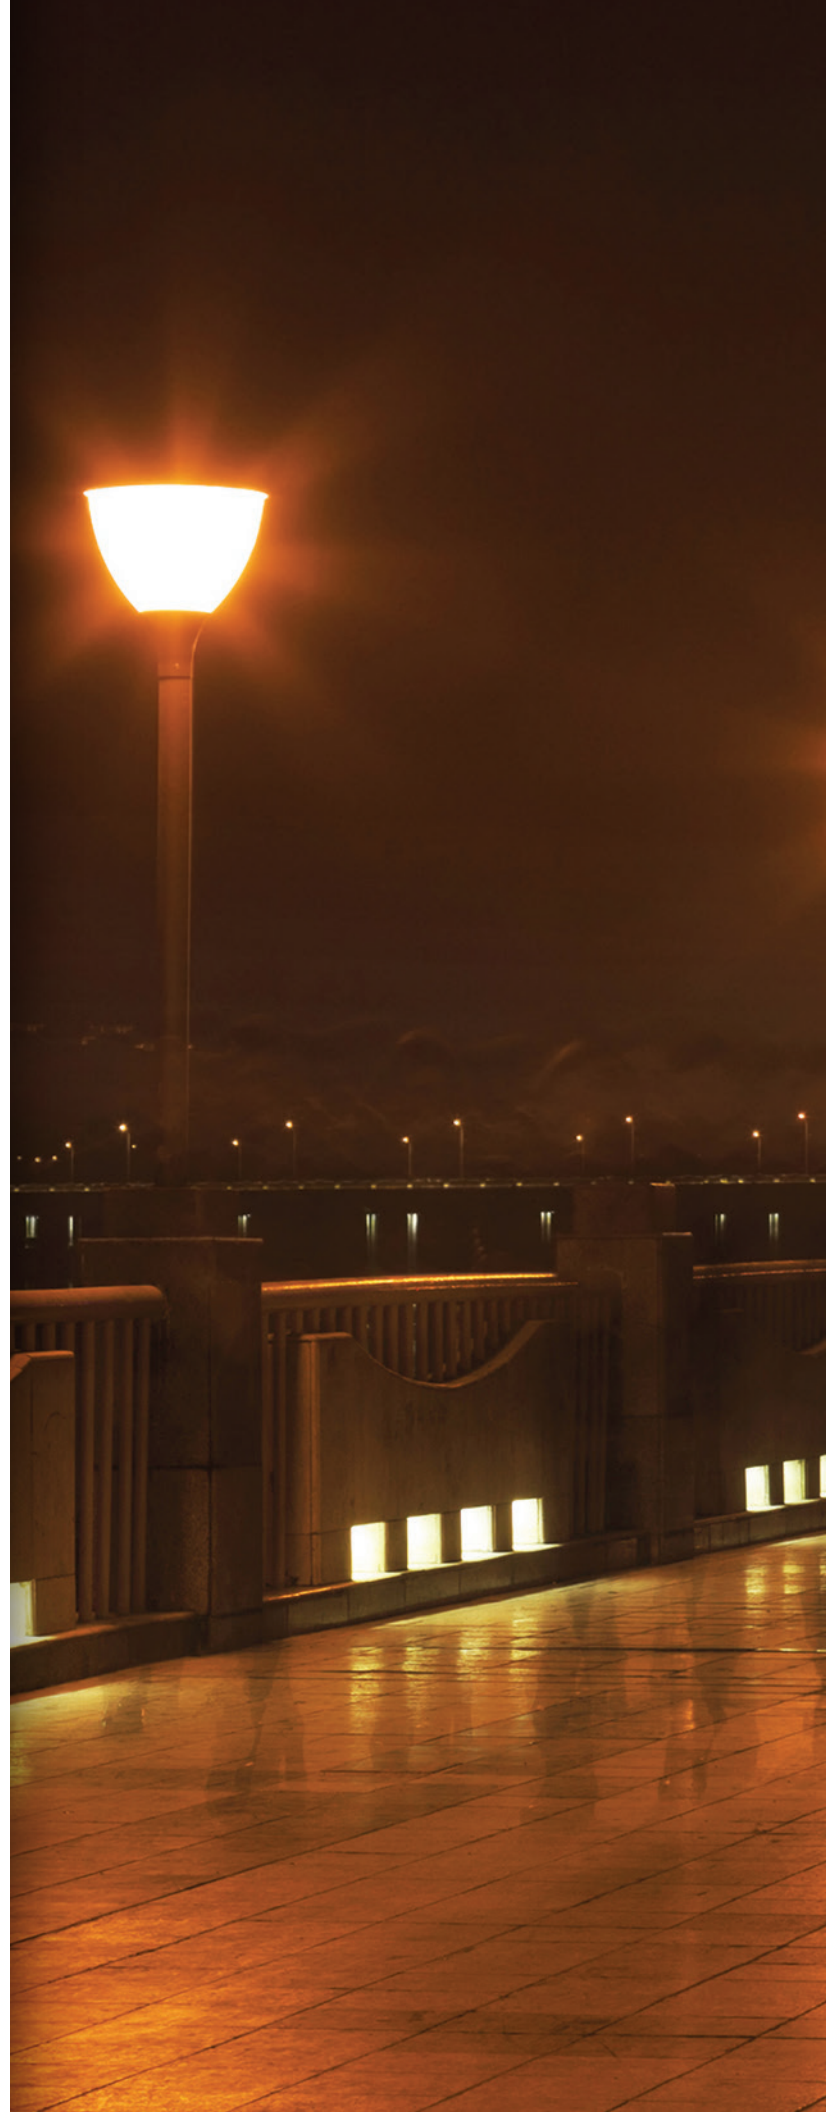



# PT-CBL3 Series

LED Corn Bulb

## FEATURES

- High lumen LED bulb for commercial or industrial applications
- For outdoor & indoor use
- Base up, down or horizontal operation
- Replacing HID, CFL, and Incandescent lamps
- Ballast by-pass - direct wire only
- UL approved for enclosed fixtures

## DISSIPATION

- Passive cooling via aluminum
- More reliability

## CONSTRUCTION

- Power pack is made of aluminum
- Better for heat dissipation
- Enough space for components on the PCB

## TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	80
CCT	5000K
LAMP BASE	E26 (EX39 adapter included)
WORKING TEMPERATURE	-40°F ~ 113°F
OPERATING HUMIDITY	20% - 70% RH
STORAGE TEMPERATURE	-40°F ~ 176°F
STORAGE HUMIDITY	10% - 57% RH
POWER FACTOR	>0.9
IP RATING	IP64 for damp locations
WARRANTY	5 year limited

INDOOR



**LM79 & LM80  
Tested**



## T8 LED TUBE

High-quality glass lens diffuser with PET coating (shatter-proof).

### HYBRID



SCAN ME,  
FOR COMPLETE  
SPECS.




#### PT-T8-4FAB2-18W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
18W	2,200 @ 3000K	up to 127 lm/W
	2,300 @ 4000K	
	2,300 @ 5000K	

### BYPASS



SCAN ME,  
FOR COMPLETE  
SPECS.

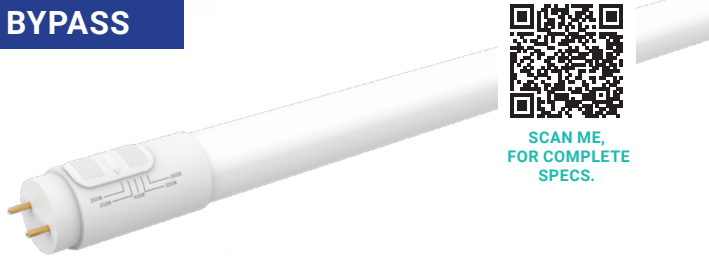

#### PT-T8-4FB-18W-5CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
18W	2,150 @ 3000K	up to 125 lm/W
	2,150 @ 3500K	
	2,200 @ 4000K	
	2,250 @ 5000K	
	2,250 @ 6500K	



Specification is subject to change without notice.





# PT-T8-4F Series

## 4' T8 LED Tube

Portor's 4' T8 Hybrid (A+B) tube is designed to work with or without traditional electrical ballasts. Our Hybrid tubes are constructed to be single-ended or double-ended, so customers don't need to worry about existing wiring schemes.


Portor's 4' T8 Bypass (B) tube is designed to work without traditional electrical ballasts. Our Bypass tubes are constructed to be single-ended or double-ended, so customers don't need to worry about existing wiring schemes.

Available in 4' and featuring color selectable technology that lets the user choose between 3000K, 3500K, 4000K, 5000K, or 6500K.

### TECHNICAL SPECIFICATION

VOLTAGE	120V-277V, 50/60 Hz
CRI	82
END CAP	G13
BEAM ANGLE	200° / 230°
WORKING TEMPERATURE	-40°F ~ 113°F
STORAGE TEMPERATURE	-40°F ~ 140°F
POWER FACTOR	>0.9
IP RATING	IP40 for damp locations
WARRANTY	5 year limited

### DIMENSIONS

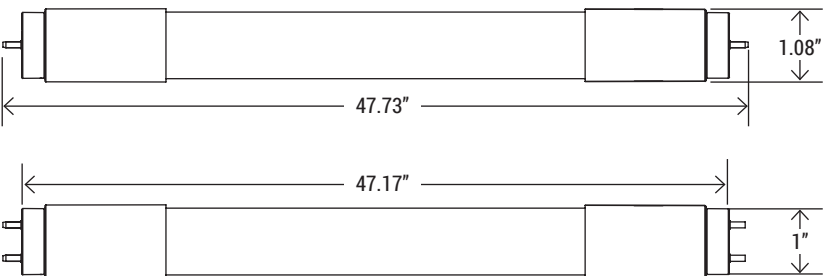



SLIM DESIGN. ENERGY EFFICIENT.  
ADVANCED OPTICAL CONTROL.

NOT FOR USE AS AN UP LIGHT



PT-AL2N-150-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
100W	14,241	144 lm/W
120W	17,400	145 lm/W
150W	21,128	143 lm/W

Based on 5000K setting. Actual lumens may vary.



PT-AL2N-300-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
200W	29,757	148 lm/W
240W	35,511	147 lm/W
300W	45,353	148 lm/W

Based on 5000K setting. Actual lumens may vary.



Specification is subject to change without notice.







# PT-AL2N Series


Area/Site Luminaire with CCT and Wattage Selector

Portor's second generation AL2 Area Light White Series is highly energy efficient and provides advanced optical control. The ultra slim profile delivers enhanced performance for general area lighting applications. The robust die-cast housing provides excellent thermal management for longer life and can withstand everyday harsh outdoor environments.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	70+
DIMMABLE	1-10V dimming
DISTRIBUTION	Type III (Standard), Type IV & V (Optional)
VOLTAGE	100V-277V, 50/60 Hz (347V-480V optional)
SENSOR	Photocell and motion sensor capable
FINISH	Bronze, White
POWER FACTOR	>0.9
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

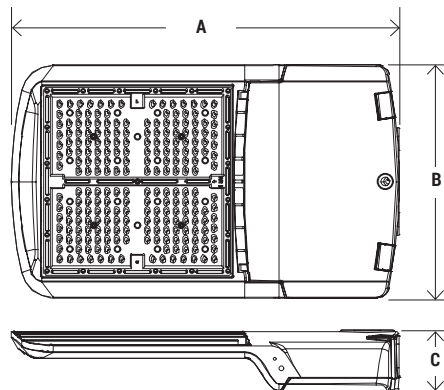

DIMENSION	PT-AL2N-150-3CP	PT-AL2N-300-3CP / 375W
A	19"	25.11"
B	11.25"	14"
C	3"	3"





ECONOMY AREA/SITE LUMINAIRE

NOT FOR USE AS AN UP LIGHT



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-ALE-150-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
70W	12,249	179 lm/W
100W	15,356	172 lm/W
150W	22,107	159 lm/W

Based on IES results @ 4000K, 80 CRI. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-ALE-300-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
200W	33,850	173 lm/W
240W	38,496	167 lm/W
300W	45,524	163 lm/W

Based on IES results @ 4000K, 80 CRI. Actual lumens may vary.



Specification is subject to change without notice.





# PT-ALE Series


Economy Area/Site Luminaire with CCT and Wattage Selector

Portor's ALE Area Light Series features outstanding light output performance, uniform illumination, and high efficacy. The one piece die-cast robust aluminum housing provides excellent thermal management for longer life and can withstand everyday harsh outdoor environments.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	1-10V dimming
DISTRIBUTION	Type III (Standard), Type IV & V (Optional)
VOLTAGE	100V-277V, 50/60 Hz (347V-480V optional)
SENSOR	Photocell and motion sensor capable
FINISH	Bronze
POWER FACTOR	>0.9
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

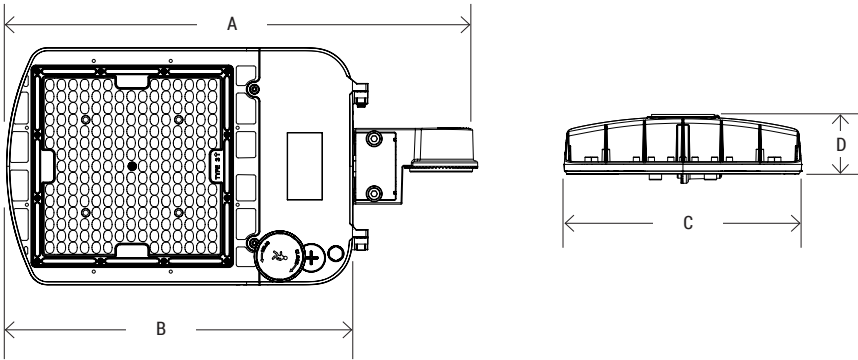

DIMENSION	PT-ALE-150-3CP	PT-ALE-300-3CP
A	19.5"	24.4"
B	14.37"	19.29"
C	9.8"	13.3"
D	2.37"	2.37"





# ARCHITECTURAL

## BOLLARD SERIES



**PT-ABL-R-DTP-C-3CP**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1,960	140 lm/W
19W	2,300	
24W	3,360	

Based on 3000K setting. Actual lumens may vary.



**PT-ABL-R-DTP-L-3CP**  
(Not DLC listed)



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1,000	75 lm/W
19W	1,420	
24W	1,800	

Based on 3000K setting. Actual lumens may vary.



**PT-ABL-R-PTP-O-3CP**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1,727	124 lm/W
19W	2,300	
24W	2,758	

Based on 3000K setting. Actual lumens may vary.



**PT-ABL-R-BTP-C-3CP**



SCAN ME,  
FOR COMPLETE  
SPECS.

WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1,960	140 lm/W
19W	2,300	
24W	3,360	

Based on 3000K setting. Actual lumens may vary.



Specification is subject to change without notice.

# PT-ABL-R Series

Architectural Round Style Bollard with CCT and Wattage Selector


Portor Lighting elevates your outdoor spaces with our Bollard Style Lighting. A perfect blend of functionality and aesthetics, our bollard lights bring safety, ambiance, and architectural charm. Experience modern illumination designed to enhance your surroundings, guiding your way with a touch of elegance. Ideal use for walkways, entrance ways, drive ways and other small-area lighting applications where low mounting heights are desirable.

Anchor bolt for bollard included (Requires assembly)

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	70+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
SURGE PROTECTOR	4KV
POWER FACTOR	>0.9
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

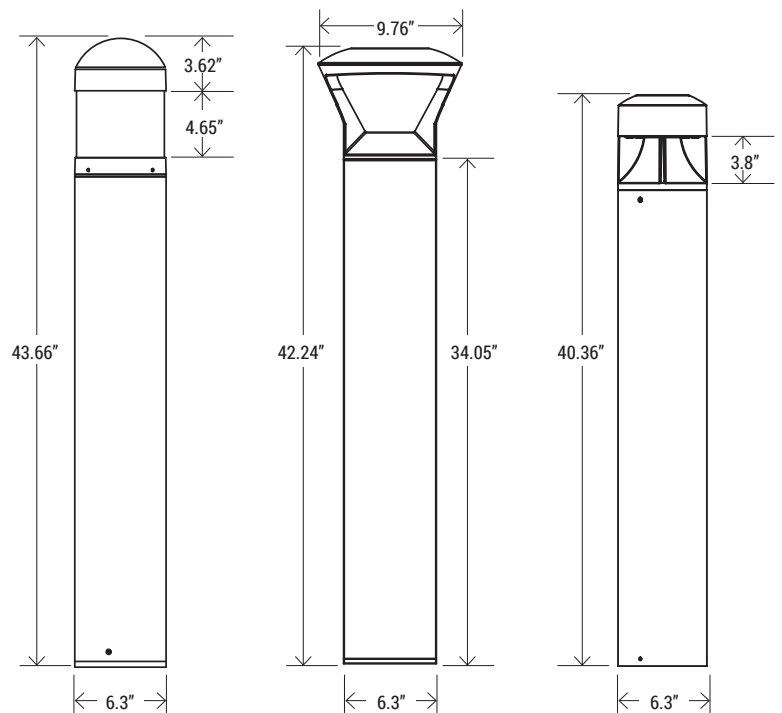



PARKING GARAGE  
SQUARE CANOPY SERIES



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-CAT2-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
40W	4,800	up to 150 lm/W
60W	8,269	
70W	9,055	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-CAT2-LW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
28W	3,875	up to 148 lm/W
35W	4,831	
40W	5,557	

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.





## PT-CAT2 Series


Square Canopy Luminaire with CCT and Wattage Selector

Portor CAT2 Series is a LED Square Canopy luminaire that combines high energy- efficient and slim profile aesthetics to deliver high lighting performance and featuring a hinged mounting plate that make installation a breeze. The CAT2 Series features color selectable technology that lets the user choose between 3000K, 4000K, or 5000K. Perfect application for parking garages, hallways, toll stations, and shopping centers.

### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V
LIGHTING ANGLE	155°
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 104°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

### DIMENSIONS

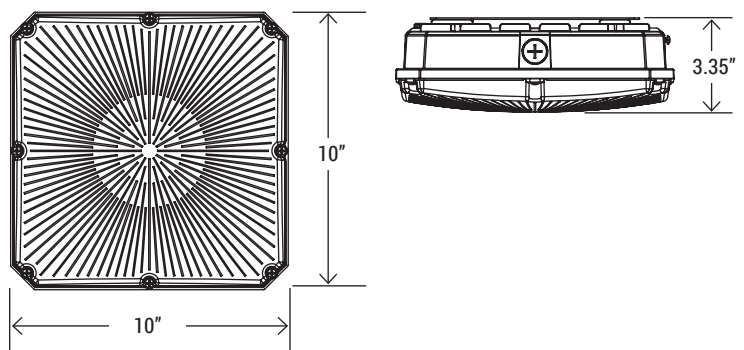

OUTDOOR





# PARKING GARAGE ROUND CANOPY SERIES



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-CAS1-MW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
55W	8,648	152 lm/W
65W	10,063	160 lm/W
75W	11,365	158 lm/W

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-CAS1-LW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
20W	3,309	156 lm/W
30W	4,678	153 lm/W
40W	5,955	148 lm/W

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.



# PT-CAS1 Series


## Round Canopy Luminaire with CCT Selector

Portor CAS1 Series is a Round Canopy luminaire that combines high energy-efficient and slim profile aesthetics to deliver high lighting performance. Featuring a hinged mounting plate that make installation a breeze. The CAS1 Series features color selectable technology that lets the user choose between 3000K, 4000K, or 5000K. Perfect application for parking garages, hallways, toll stations, and shopping centers.

### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	Continuous Dimming to 10% or below
VOLTAGE	120V-277V
LIGHTING ANGLE	150°
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 104°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

### DIMENSIONS

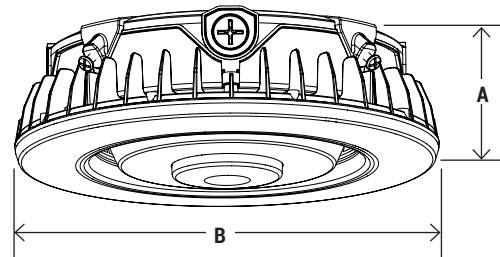

DIMENSION	PT-CAS1-MW-3CP	PT-CAS1-LW-3CP
A	11"	11"
B	3.11"	3.11"





BARN LIGHT SERIES



PT-BL-LW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
36W	4,680	up to 125 lm/W
48W	6,240	
60W	7,037	

Based on 3000K setting. Actual lumens may vary.



PT-BL-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
72W	9,360	up to 123 lm/W
96W	12,480	
120W	13,870	

Based on 3000K setting. Actual lumens may vary.



FOR COMPLETE  
SPECS, SCAN ME.



Specification is subject to change without notice.





# PT-BL Series

Dusk-to-Dawn Barn Light with CCT and Wattage Selector


The Dusk to Dawn Barn Light is the perfect solution for many general purpose outdoor applications. It replaces traditional 100W-400W HID fixtures and can mount directly on a wall or to a pole. All fixtures are installed with a photocell as default. Ideal use for farms/barns, storage sheds, entryways/pathways, industrial yards, security, building perimeters, and area lighting.

(Mounting pole and bracket included)

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	1-10V dimmable
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
SENSOR	Photocell installed
SURGE PROTECTOR	4KV
POWER FACTOR	>0.9
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

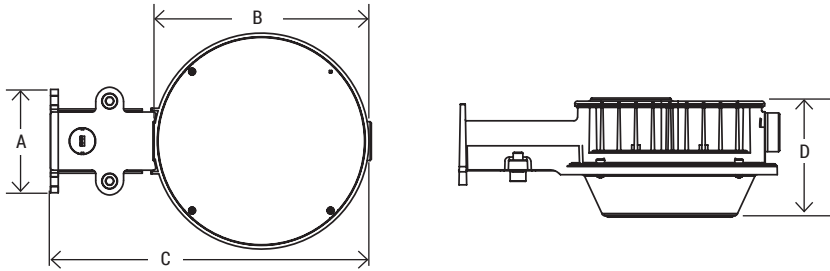

DIMENSION	PT-BL-LW-3CP	PT-BL-HW-3CP
A	3.36"	3.36"
B	7"	9.49"
C	10.37"	13.48"
D	3.87"	4.48"





## FULL CUT-OFF WALL PACK

WITH DEFAULT INTEGRATED PHOTOCELL



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPF-LW-3CP / PT-WPF-LW-3CP-W

WATTAGE	DELIVERED LUMENS	EFFICACY
36W	5,954	165 lm/W
48W	7,552	160 lm/W
60W	8856	157 lm/W

*Based on 4000K setting. Actual lumens may vary.*



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPF-HW-3CP / PT-WPF-HW-3CP-W

WATTAGE	DELIVERED LUMENS	EFFICACY
72W	10,989	164 lm/W
96W	13,934	158 lm/W
120W	17,163	154 lm/W

*Based on 4000K setting. Actual lumens may vary.*

Available

**EM BATTERY**  
OPTION



Specification is subject to change without notice.





# PT-WPF Series

Architectural Full Cut-Off Wall Pack Luminaire with CCT and Wattage Selector


Portor PT-WPF Series is a full cut-off wall mounted luminaire designed in a slim profile to seamlessly blend into the environment while providing clean lines, a stylish finish, and optimal lighting; while maintaining a robust, durable housing. The WPF Series is available in two power selectable sizes with wattages ranging from 36W to 120W and integrates CCT selectable technology with 30K, 40K, and 50K options.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	Integrated photocell
FINISH	Bronze, White
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F (with EM option)*
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

\*Please check EM label for more info

## DIMENSIONS

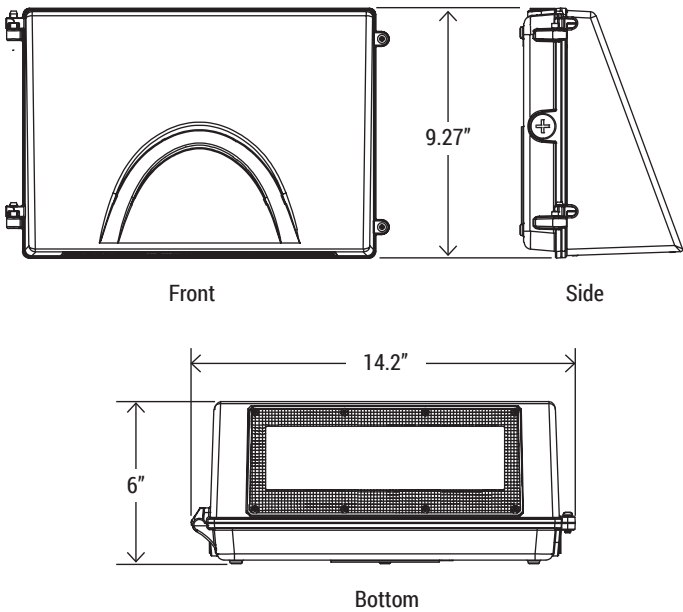



## FULL CUT-OFF WALL PACK

WITH DEFAULT INTEGRATED PHOTOCELL



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPA-MW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
36W	5,538 / 5,824 / 5,801	up to 169 lm/W
48W	7,251 / 7,732 / 7,544	up to 167 lm/W
60W	8,701 / 9,322 / 9,206	up to 152 lm/W

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPA-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
60W	9,297 / 9,785 / 9,584	up to 169 lm/W
80W	12,170 / 12,771 / 12,402	up to 166 lm/W
100W	14,306 / 15,528 / 15,178	up to 161 lm/W

Based on IES results. Actual lumens may vary.



Specification is subject to change without notice.



## PT-WPA Series

Architectural Wall Pack Luminaire with CCT and Wattage Selector


Designed for durability and versatility, the IP65 Rated The PT-WPA Series Wall Pack is ideal for wet locations such as processing workshops, storage warehouses, steel mills, toll booths, waiting rooms, and railway station platforms. This robust wall pack ensures reliable performance and superior illumination in challenging environments.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls..


### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	Integrated photocell
FINISH	Bronze, White
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F (with EM option)*
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

### DIMENSIONS

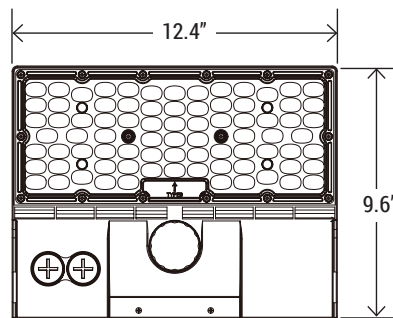

Bottom

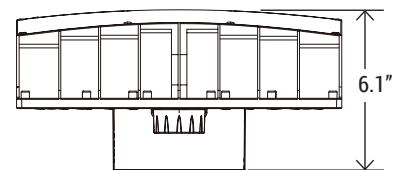

Front





## FULL CUT-OFF WALL PACK

WITH DEFAULT INTEGRATED PHOTOCELL



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPR-MW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
24W	3,702 / 3,831 / 3,703	up to 164 lm/W
32W	4,873 / 5,133 / 4,882	up to 162 lm/W
40W	5,950 / 5,354 / 6,044	up to 159 lm/W

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPR-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
48W	7553 / 7833 / 7481	up to 169 lm/W
64W	9770 / 10280 / 9756	up to 165 lm/W
80W	11,648 / 12,442 / 11,798	up to 160 lm/W

Based on IES results. Actual lumens may vary.

## WITH UPLIGHT/DOWNLIGHT

When switch is toggled to "Down", the Uplight (indirect) emits 15% of the full lumen output, and Downlight (direct) emits 85%



Specification is subject to change without notice.





# PT-WPR Series

Round Wall Pack Luminaire with CCT and Wattage Selector

Designed for durability and versatility, the IP65 Rated The PT-WPR Series Wall Pack is ideal for wet locations such as processing workshops, storage warehouses, steel mills, toll booths, waiting rooms, and railway station platforms. This robust wall pack ensures reliable performance and superior illumination in challenging environments.


Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls..

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	Integrated photocell
FINISH	Bronze, White
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F (with EM option)*
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

OUTDOOR

## DIMENSIONS

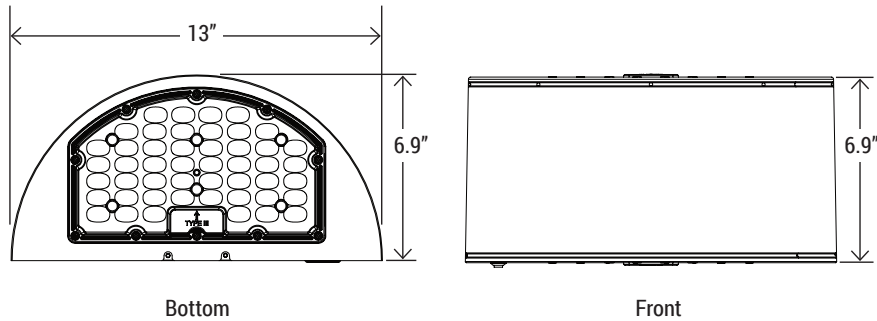



FULL CUT-OFF WALL PACK

WITH DEFAULT INTEGRATED PHOTOCELL



PT-WPC-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
48W	7,238 @ 3000K	154 lm/W
	7,599 @ 4000K	168 lm/W
	7,440 @ 5000K	161 lm/W

WATTAGE	DELIVERED LUMENS	EFFICACY
64W	9,233 @ 3000K	144 lm/W
	10,012 @ 4000K	164 lm/W
	9,700 @ 5000K	155 lm/W

WATTAGE	DELIVERED LUMENS	EFFICACY
80W	11,213 @ 3000K	139 lm/W
	12,274 @ 4000K	161 lm/W
	11,977 @ 5000K	152 lm/W

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.





## PT-WPC Series

Circle Wall Pack Luminaire with CCT and Wattage Selector

Designed for durability and versatility, the IP65 Rated The PT-WPC Series Wall Pack is ideal for wet locations such as processing workshops, storage warehouses, steel mills, toll booths, waiting rooms, and railway station platforms. This robust wall pack ensures reliable performance and superior illumination in challenging environments.


Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls..

### TECHNICAL SPECIFICATION


CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	Integrated photocell
FINISH	Bronze, White
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F (with EM option)*
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

OUTDOOR

### DIMENSIONS

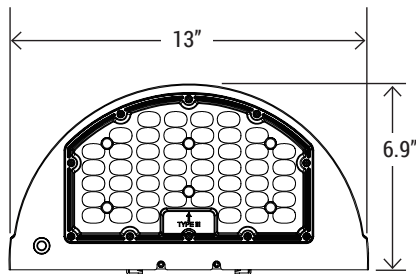

BOTTOM

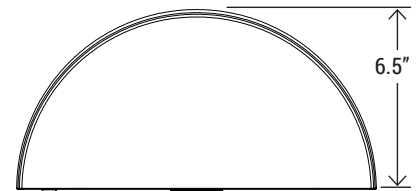

FRONT





## COMMERCIAL GRADE NON CUT-OFF WALL PACK



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPH3-LW-3CP / PT-WPH3-LW-3CP-W

WATTAGE	DELIVERED LUMENS	EFFICACY
45W	6,176	134 lm/W
60W	8,256	131 lm/W
75W	9,466	127 lm/W

*Based on 4000K setting. Actual lumens may vary.*



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-WPH3-HW-3CP / PT-WPH3-HW-3CP-W

WATTAGE	DELIVERED LUMENS	EFFICACY
80W	9,083	128 lm/W
100W	11,638	126 lm/W
120W	13,741	120 lm/W

*Based on 4000K setting. Actual lumens may vary.*

Available

**EM BATTERY**  
OPTION



Specification is subject to change without notice.





## PT-WPH3 Series



Architectural Non Cut-Off Wall Pack Luminaire with CCT and Wattage Selector

Portor's PT-WPH3 series combines economical and security solution for outdoor perimeter and building facades. WPH3 is wattage and color selectable, and can be programmed with a CCT of 4000K, 4500K or 5000K, eliminating the need to stock multiple color temperatures. Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.

### TECHNICAL SPECIFICATION

CCT	4000K/4500K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
FINISH	Bronze, White
LENS	Borosilicate glass lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

### DIMENSIONS

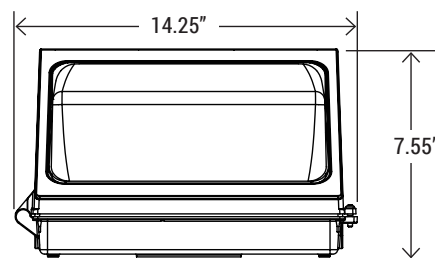

OUTDOOR



**WATTAGE**  
SELECTOR



THE THIRD GENERATION  
MINI WALL PACK



PT-WPM3-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,939 @ 3000K	up to 151 lm/W
	2,187 @ 4000K	
	2,104 @ 5000K	

WATTAGE	DELIVERED LUMENS	EFFICACY
20W	2,796 @ 3000K	up to 151 lm/W
	2,871 @ 4000K	
	2,711 @ 5000K	

WATTAGE	DELIVERED LUMENS	EFFICACY
25W	3,077 @ 3000K	up to 146 lm/W
	3,487 @ 4000K	
	3,327 @ 5000K	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.





## PT-WPM3 Series


Mini Wall Pack with CCT and Wattage Selector

Portor's third generation PT-WPM3 series combines economical and security solution for outdoor perimeter and building facades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.

### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	Photocell ready (Screw-in type)
LENS	PC lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 104°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

### DIMENSIONS

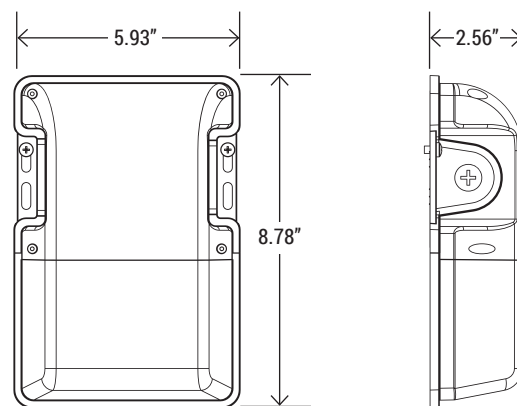



# HIGH OUTPUT FLOOD LIGHT

Shown in Slipfitter Mount



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-FLHO-MW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
205W	32,906	169 lm/W
225W	36,028	169 lm/W
255W	39,869	160 lm/W

Based on 4000K setting. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

## PT-FLHO-HW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
270W	43,425	169 lm/W
300W	47,121	166 lm/W
330W	52,144	164 lm/W

Based on 4000K setting. Actual lumens may vary.



Specification is subject to change without notice.





# PT-FLH0 Series

High Output Flood Light with CCT and Wattage Selector

The FLH0 - High Output flood light series combines energy efficiency and advance optical control. The slim profile delivers enhanced lighting performance. Robust housing can withstand harsh outdoor environments.


Available with knuckle mount or a u-bracket mount for convenient mounting option. Ideal use for facades, outdoor, signage, shopping centers, industrial areas and other outdoor places with spot lighting is needed.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	70+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SURGE PROTECTION	L/N-PE: 10KV, L-N:6KV
BEAM ANGLE	140° x 120°
LENS	Clear tempered glass lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
OPERATING HUMIDITY	20%-90% RH
IP RATING	IP65 Wet Location
EPA (MW/HW)	1.4 ft <sup>2</sup> / 1.7 ft <sup>2</sup>
WARRANTY	5 year limited

OUTDOOR

## DIMENSIONS

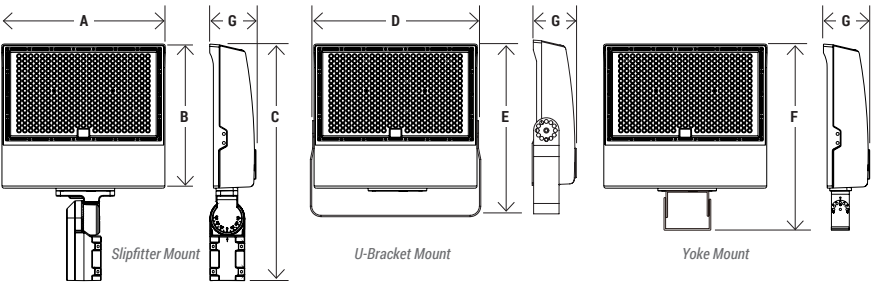

CATALOG	A	B	C	D	E	F	G
PT-FLH0-MW	13.9"	12.6"	20.6"	14.5"	14.9"	18.1"	3.7"
PT-FLH0-HW	16.2"	13.5"	21.6"	17"	16.3"	17"	3.8"





THE SECOND GENERATION  
FLOOD LIGHT MINI



Knuckle Mount



U-Bracket Mount

PT-FLM2-MW-3CP

WATTAGE	DELIVERED LUMENS	EFFICACY
40W	6,399 @ 4000K	up to 165 lm/W
50W	7,762 @ 4000K	
60W	9,229 @ 4000K	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.

PT-FLM2-15W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,994 @ 3000K	up to 150 lm/W
	2,135 @ 4000K	
	2,064 @ 5000K	

Based on IES results. Actual lumens may vary.

PT-FLM2-30W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	4,178 @ 3000K	up to 153 lm/W
	4,442 @ 4000K	
	4,341 @ 5000K	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.





# PT-FLM2 Series

Flood Light Mini with CCT and Wattage Selector


The second generation FLM2 flood light series combines energy efficiency and advance optical control. The slim profile delivers enhanced lighting performance. Robust housing can withstand harsh outdoor environments.

Available with knuckle mount or a u-bracket mount for convenient mounting option. Ideal use for facades, outdoor, signage, shopping centers, industrial areas and other outdoor places with spot lighting is needed.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	70+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
SENSOR	ON/Off photocell (comes standard)
BEAM ANGLE	>130° x 130°
LENS	PC lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

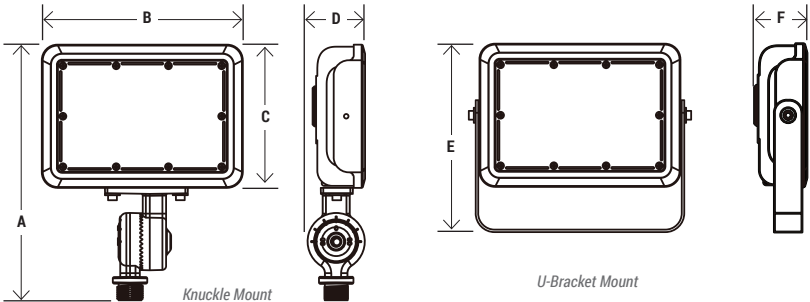

(Knuckle and U-bracket mounting included)

CATALOG	A	B	C	D	E	F
PT-FLM2-MW-3CP	9"	8.27"	5.5"	1.81"	7.4"	1.8"
PT-FLM2-15W-3CCT	8"	6.3"	4.49"	1.81"	5.9"	1.65"
PT-FLM2-30W-3CCT	7.2"	5.24"	3.62"	1.81"	5"	1.77"





# THE NEW GENERATION FLOOD LIGHT UP TO 60W



Knuckle Mount



U-Bracket Mount

## PT-FLS1-15W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	1,993 @ 3000K	up to 149 lm/W
	2,176 @ 4000K	
	2,145 @ 5000K	

Based on IES results. Actual lumens may vary.

## PT-FLS1-35W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
35W	4,784 @ 3000K	up to 142 lm/W
	5,425 @ 4000K	
	5,168 @ 5000K	

Based on IES results. Actual lumens may vary.

## PT-FLS1-60W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
60W	7,750 @ 3000K	up to 147 lm/W
	8,619 @ 4000K	
	8,640 @ 5000K	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.







# PT-FLS1 Series

15W/35W/60W Flood Light with CCT Selector


The FLS1 flood light series combines energy efficiency and advance optical control. The slim profile delivers enhanced lighting performance. Robust housing can withstand harsh outdoor environments.

Available with knuckle mount or a u-bracket mount for convenient mounting option. Ideal use for facades, outdoor, signage, shopping centers, industrial areas and other outdoor places with spot lighting is needed.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
BEAM ANGLE	145°
LENS	Clear tempered glass lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited

## DIMENSIONS

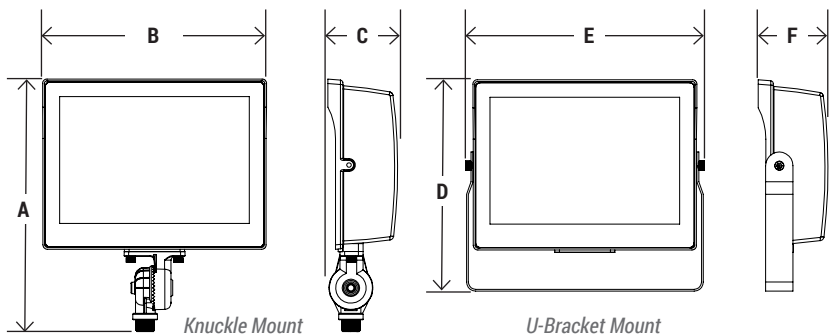

CATALOG	A	B	C	D	E	F	EPA
PT-FLS1-15W	9.2"	7.4"	2.6"	7.2"	7.9"	2.6"	0.43 ft²
PT-FLS1-35W							
PT-FLS1-60W	10.9"	9.6"	3"	9.1"	9.6"	3"	0.68 ft²





# THE NEW GENERATION FLOOD LIGHT UP TO 140W



Slipfitter Mount

U-Bracket Mount

PT-FLS1-105W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
105W	14,093 @ 3000K	up to 150 lm/W
	15,513 @ 4000K	
	15,302 @ 5000K	

Based on IES results. Actual lumens may vary.

PT-FLS1-140W-3CCT

WATTAGE	DELIVERED LUMENS	EFFICACY
140W	18,200 @ 3000K	up to 140 lm/W
	19,600 @ 4000K	
	18,900 @ 5000K	

Based on IES results. Actual lumens may vary.



SCAN ME,  
FOR COMPLETE  
SPECS.



Specification is subject to change without notice.





# PT-FLS1 Series

105W/140W Flood Light with CCT Selector


The FLS1 flood light series combines energy efficiency and advance optical control. The slim profile delivers enhanced lighting performance. Robust housing can withstand harsh outdoor environments.

Available with slipfitter mount or a u-bracket mount for convenient mounting option. Ideal use for facades, outdoor, signage, shopping centers, industrial areas and other outdoor places with spot lighting is needed.

## TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V, 50/60 Hz
BEAM ANGLE	145°
LENS	Clear tempered glass lens
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
EPA	1.35 ft²
WARRANTY	5 year limited

## DIMENSIONS

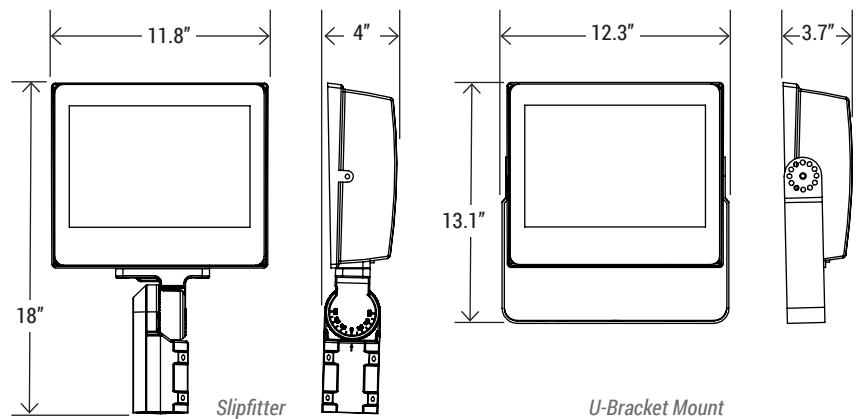

OUTDOOR





## EDGE-LIT EXIT SIGN SERIES

Portor's Exit Sign and Emergency Light series is UL924, UL damp location, NFPA 101, NEC/ OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-EDL-1-R-CLR-AL

Clear Edge-Lit Exit Sign with Battery Back-up

SERIES	STYLE	FACE	LETTER	FINISH	HOUSING	MOUNTING
PT-EXL	EDL (Edge-lit)	1	R (Red)	CLR (Clear)	AL (Aluminum)	Ceiling, Wall, Side



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-EDL-2-R-MIR-AL

Mirror Edge-Lit Exit Sign with Battery Back-up

SERIES	STYLE	FACE	LETTER	FINISH	HOUSING	MOUNTING
PT-EXL	EDL (Edge-lit)	2	R (Red)	MIR (Mirror)	AL (Aluminum)	Ceiling, Wall, Side





## REMOTE CAPABLE EXIT SIGN/EMERGENCY LIGHT SERIES

Portor's Exit Sign and Emergency Light series is UL924, UL damp location, NFPA 101, NEC/ OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-C-S-RC

Remote Capable Exit Sign and Emergency Light Combo with Battery Back-up

SERIES	STYLE	LAMP	REMOTE	FINISH	MOUNTING
PT-EXL	C (Combo)	S (Square)	RC (Remote Capable)	White	Ceiling, Wall

(Remote Capable up to 2W)



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EML-S-RC

Remote Capable Square Double Head Emergency Light

SERIES	LAMP	REMOTE	FINISH	MOUNTING
PT-EML	S (Square)	RC (Remote Capable)	White	Ceiling, Wall

(Remote Capable up to 2W)





## EXIT SIGN AND EMERGENCY LIGHT SERIES



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-C-SLM-RED

Slim Bi-Color Exit Sign and Emergency Light Combo

SERIES	STYLE	BODY	LETTER	FINISH	MOUNTING
PT-EXL	C (Combo)	SLM (Slim)	Red	White	Ceiling, Wall



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-C-R

Round Bi-Color Exit Sign and Emergency Light Combo

SERIES	STYLE	LAMP	FINISH	MOUNTING
PT-EXL	C (Combo)	R (Round)	White	Ceiling, Wall, Side



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-C-S

### PT-EXL-C-S-SAL

Square Bi-Color Exit Sign and Emergency Light Combo

SERIES	STYLE	LAMP	FINISH	MOUNTING
PT-EXL	C (Combo)	S (Square)	White	Ceiling, Wall



SCAN ME,  
FOR COMPLETE  
SPECS.

### PT-EXL-2-RED

Slim Thermoplastic Exit Sign with Emergency Battery Back-up

SERIES	FACE	LETTER	FINISH	MOUNTING
PT-EXL	2 (Face)	RED	White	Ceiling, Wall, Side





## EXIT SIGN AND EMERGENCY LIGHT SERIES



**PT-EXL-2**

Bi-Color Exit Sign with Emergency Battery Back-up

SERIES	STYLE	LETTER	FINISH	MOUNTING
PT-EXL	2 (Face)	Red/Green	White	Ceiling, Side



**PT-EXL-2-SAL**



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-EML-R**

Round Double Head Emergency Light

SERIES	STYLE	FINISH	MOUNTING
PT-EML	R (Round)	White	Ceiling, Wall



SCAN ME,  
FOR COMPLETE  
SPECS.



**PT-EML-S**

Square Double Head Emergency Light

SERIES	STYLE	FINISH	MOUNTING
PT-EML	S (Square)	White	Ceiling, Wall



SCAN ME,  
FOR COMPLETE  
SPECS.





# COLOSSUS LIGHTING

## CLVS-MO

4' / 8' Modest Style Vapor-Seal LED Luminaire

The CLVS Vapor-Seal series offers an industry-leading performance with deep energy savings and continuous 0-10V dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Easy installation for both surface-mount and suspended mount.



**IP66**  
NEMA 4X



WATTAGE	DELIVERED LUMENS	EFFICACY
CLVS-MO-50W	6,650 @ 5000K	up to 133 lm/W
CLVS-MO-100W	13,300 @ 5000K	

*Based on IES results. Actual lumens may vary.*

## CLVS-WD

4' Wide Style Vapor-Seal LED Luminaire



**IP66**  
NEMA 4X



WATTAGE	DELIVERED LUMENS	EFFICACY
CLVS-WD-200W	27,200 @ 5000K	up to 136 lm/W

*Based on IES results. Actual lumens may vary.*





# COLOSSUS LIGHTING

## CLRHF

### Round High Bay LED Luminaire

The CLRHF series is IP69K rated and can be used indoors or outdoors, as it protects against water, dust, and vapor.




WATTAGE	DELIVERED LUMENS*	EFFICACY
CLRHF-150W	22,920 @ 5000K	up to 153 lm/W
CLRHF-200W	30,560 @ 5000K	
CLRHF-240W	36,744 @ 5000K	

\* Lumens are for 120-277V

## CLFL1

### Flood Light LED Luminaire


The CLFL1 series is IP65 rated and can be used indoors or outdoors, as it protects against water, dust, and vapor. Comes standard with surface mounting kit. Available in 120-277V only.

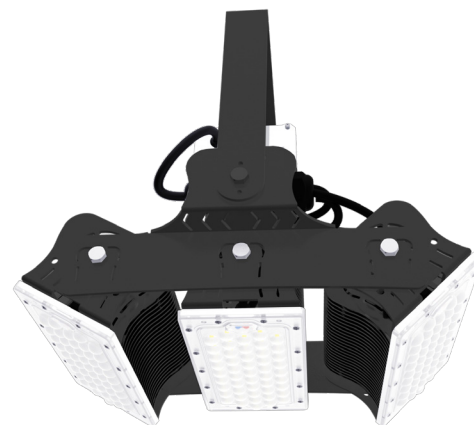

WATTAGE	DELIVERED LUMENS*	EFFICACY
CLFL1-100W	17,000 @ 5000K	up to 170 lm/W
CLFL1-200W	34,000 @ 5000K	
CLFL1-300W	51,000 @ 5000K	



## ACCESSORIES

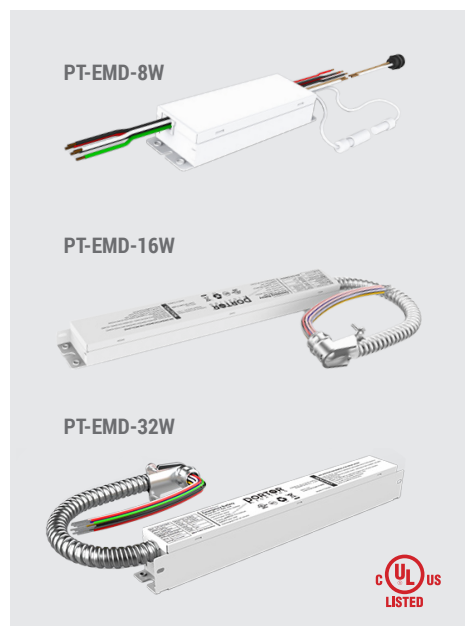


### EMD Series - Emergency Battery Back-up

- UL Listed
- 100V-277V
- 90 min operation
- Li-ion type battery
- 24 hr charging time

#### LOW OUTPUT VOLTAGE EM BATTERY

Cat. No.	Watts	Output Voltage	Current
<b>PT-EMD-8W</b>	8W	<b>20V-52V DC</b>	50mA max
<b>PT-EMD-16W</b>	16W	<b>20V-52V DC</b>	120mA max
<b>PT-EMD-32W</b>	32W	<b>20V-52V DC</b>	150mA max

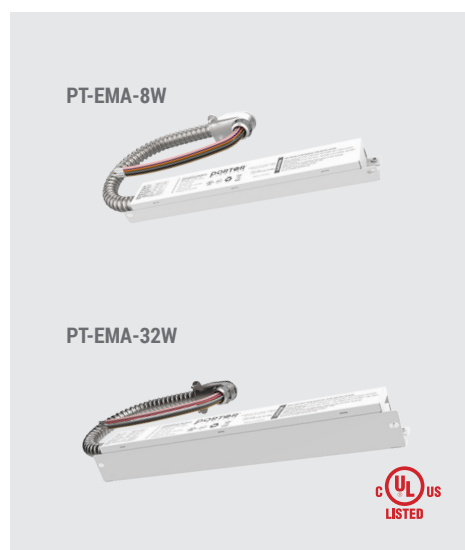


### EMA Series - Emergency Battery Back-up

- UL Listed
- 100V-277V
- 90 min operation
- Li-ion type battery
- 24 hr charging time

#### LOW OUTPUT VOLTAGE EM BATTERY

Cat. No.	Watts	Output Voltage	Current
<b>PT-EMA-8W</b>	8W	<b>150V-170V DC</b>	80mA max
<b>PT-EMA-25W</b>	25W	<b>120V-190V DC</b>	80mA max
<b>PT-EMA-32W</b>	32W	<b>120V-190V DC</b>	80mA max

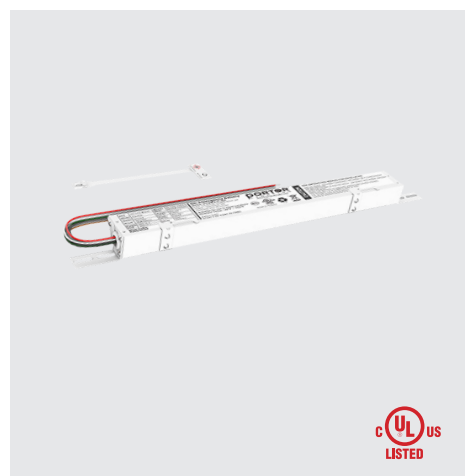

### EMA-P Series - Emergency Battery Back-up

- UL Listed
- 100V-277V
- 90 min operation
- Li-ion type battery
- 24 hr charging time

#### LOW OUTPUT VOLTAGE EM BATTERY

Cat. No.	Watts	Output Voltage	Current
<b>PT-EMA-P-8W</b>	8W	<b>150V-170V DC</b>	80mA max




### EMU Series - Emergency LED Driver for Round High Bay

UL Listed • 100V-347V • 90 min operation • Li-ion type battery • 24 hr charging time  
• Remote is optional

See compatibility chart on page 144

Cat. No.	EM Power	Output Voltage	Current
<b>PT-EMU3-25W</b>	25W	<b>170V DC</b>	200mA max
<b>PT-EMU3-40W</b>	40W	<b>170V DC</b>	200mA max
<b>RC-EMU</b>	Remote Control for EMU		

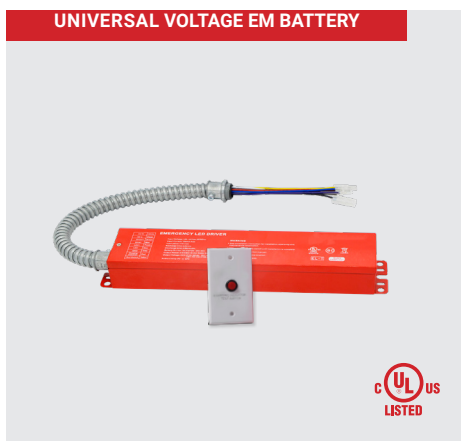

### EMG Series - LED Emergency Battery Back-up

UL Listed • 100V-347V • 90 min operation • Li-ion type battery • 24 hr charging time

See compatibility chart on page 144

Cat. No.	Watts	Output Voltage	Current
<b>PT-EMG-8W</b>	8W	<b>170V DC</b>	100mA max
<b>PT-EMG-15W</b>	15W	<b>170V DC</b>	200mA max
<b>PT-EMG-25W</b>	25W	<b>170V DC</b>	200mA max



### EM1 Series - LED Emergency Battery Back-up

UL Listed • 100V-277V • 90 min operation • Li-ion type battery • 24 hr charging time

See compatibility chart on page 144

Cat. No.	Watts	Output Voltage	Current
<b>PT-EM1-15W</b>	15W	<b>25V-50V DC</b>	100mA max
<b>PT-EM1-30W</b>	30W	<b>25V-50V DC</b>	100mA max



### EMN Series - LED Emergency Battery Back-up


UL Listed • 100V-277V • 90 min operation • Li-ion type battery • 24 hr charging time

See compatibility chart on page 144

Cat. No.	Watts	Output Voltage	Current
<b>PT-EMN-15W-050</b>	15W	<b>25V-50V DC</b>	100mA max



## ACCESSORIES

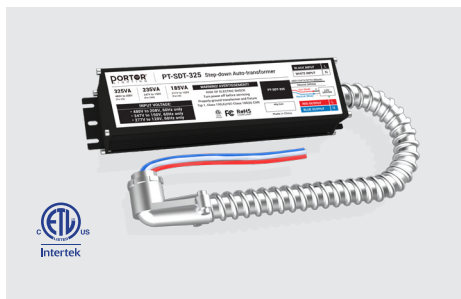


### SDT-325 - Step-down Auto-transformer

Our new PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices.

**PLEASE CONSULT FACTORY BEFORE USE**

Cat. No.	Description
<b>PT-SDT-325</b>	Step-down Auto-transformer (325 VA Transformer-A Type)

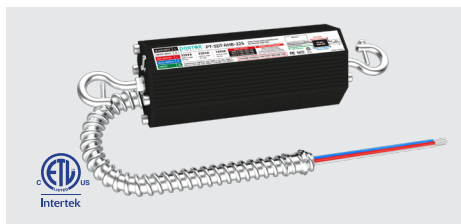

### SDT-RHB-325 - Step-down Auto-transformer for Round High Bay

Cat. No.	Description
<b>PT-SDT-RHB-325</b>	Step-down Auto-transformer (325 VA Transformer-A Type)



### MC Series - 6-ft Metal Flex Whip

Fully assemble whips • 18 AWG • Flexible 3/8" metal conduit • 6" wire leads

Cat. No.	No. of Wire	Type
<b>MC-5W-SC-6F</b>	5	<b>Screw-in</b>
<b>MC-6W-SC-6F</b>	6	
<b>MC-5W-SN-HD3-6F</b>	5	<b>Snap-in</b>
<b>MC-6W-SN-HD3-6F</b>	6	



### CON-90 - 90° Adapter for use w/ MC Series

Cat. No.	Description
<b>CON-90</b>	90° Adapter for use w/ MC product line



### MOTION SENSOR - Dimmable Motion Sensor

Cat. No.	Description
<b>PT-UNI-35-PR</b>	Dimmable Motion Sensor
<b>ELB-UNI</b>	Elbow adapter for PT-UNI-35-PR (required)

See compatibility chart on page 116



### MOTION SENSOR - Motion Sensor


Cat. No.	Description
<b>PT-MSK-LV-MW</b>	Low Voltage Micro Wave Motion Sensor

See compatibility chart on page 116



### MS-WM - Dimmable Motion Sensor

Cat. No.	Description
<b>MS-MW</b>	Dimmable Motion Sensor

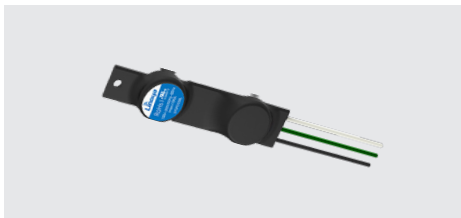

### SURGE PROTECTOR

Cat. No.	Description
<b>SP-10KV-LV</b>	100V-300V/50-60 Hz Surge Protector
<b>SP-10KV-HV</b>	277V-480V/50-60 Hz Surge Protector



### PSA (not installed) - Adjustable Photocell

Cat. No.	Description
<b>PSA</b>	Adjustable Photocell (120V-277V)



### PSB (not installed) - Photocell

Cat. No.	Description
<b>PSB</b>	Photocell (120V-277V)



### MS-WP3 (not installed) - LV Microwave Bi-Level Sensor

Cat. No.	Description
<b>MS-WP3</b>	Motion Sensor for Wallpack



### MSH-RC2

Remote Control


Cat. No.
<b>MSH-RC2</b> (Works with MS-UNI-PR, MS-UNI-MW, PT-UNI2-SP-PR, PT-UNI2-SP-MW)



### MSS-RC-100

Remote Control

Cat. No.
<b>MSS-RC-100</b> Remote Control for Motion Sensor



### MSK-LV-RC

Low Voltage Remote Control

Cat. No.
<b>MSK-LV-RC</b> Low Voltage Remote Control



**5PWC**  
Waterproof 5-Prong Wire Connector



**3PWC**  
Waterproof 3-Prong Wire Connector



**Scan me for our complete accessory line**



## ACCESSORIES


### Replacement Trim Options for **PT-DLR Baffle Series**:



Part #
<b>TR-DLR-4I-BK</b>
<b>TR-DLR-6I-BK</b>



Part #
<b>TR-DLR-4I-BN</b>
<b>TR-DLR-6I-BN</b>



Part #
<b>TR-DLR-4I-BZ</b>
<b>TR-DLR-6I-BZ</b>

### Replacement Trim Options for **PT-DLR Smooth Series**:



Part #
<b>TR-DLR-S-4I-BK</b>
<b>TR-DLR-S-6I-BK</b>



Part #
<b>TR-DLR-S-4I-BN</b>
<b>TR-DLR-S-6I-BN</b>



Part #
<b>TR-DLR-S-4I-BZ</b>
<b>TR-DLR-S-6I-BZ</b>

### Replacement Trim Options for **PT-CDL2 Series**:



Part #
<b>TRR-CDL-6I-BK</b>
<b>TRR-CDL-8I-BK</b>
<b>TRR-CDL-10I-BK</b>



Part #
<b>TRR-CDL-6I-BN</b>
<b>TRR-CDL-8I-BN</b>
<b>TRR-CDL-10I-BN</b>



Part #
<b>TRR-CDL-6I-BZ</b>
<b>TRR-CDL-8I-BZ</b>
<b>TRR-CDL-10I-BZ</b>

### Replacement Round Trim Ring Options for **PT-DLSM2 Series**:



Part #
<b>TRR-SM2-5I-BK</b>
<b>TRR-SM2-7I-BK</b>
<b>TRR-SM2-9I-BK</b>
<b>TRR-SM-12I-BK</b>



Part #
<b>TRR-SM2-5I-BN</b>
<b>TRR-SM2-7I-BN</b>
<b>TRR-SM2-9I-BN</b>
<b>TRR-SM-12I-BN</b>



Part #
<b>TRR-SM2-5I-BZ</b>
<b>TRR-SM2-7I-BZ</b>
<b>TRR-SM2-9I-BZ</b>
<b>TRR-SM-12I-BZ</b>

### Replacement Square Trim Ring Options for **PT-DLSM2 Series**:



Part #
<b>TRS-SM-5I-BK</b>
<b>TRS-SM-7I-BK</b>
<b>TRS-SM-9I-BK</b>
<b>TRS-SM-12I-BK</b>




Part #
<b>TRS-SM-5I-BN</b>
<b>TRS-SM-7I-BN</b>
<b>TRS-SM-9I-BN</b>
<b>TRS-SM-12I-BN</b>




Part #
<b>TRS-SM-5I-BZ</b>
<b>TRS-SM-7I-BZ</b>
<b>TRS-SM-9I-BZ</b>
<b>TRS-SM-12I-BZ</b>

### Mounting Options for **PT-DLS/PT-DLS2/PT-DLSB/PT-DLSB2/PT-DLG(2)/PT-DLFG(2)/PT-CDL2 Series**:



**UNI-DLS-R**  
4"/6" Universal LED  
Housing for New Construction



**RP-UNI-R-46**  
4"/6" Universal LED  
Rough plate



**RP-DLS-R-8I**  
8" LED Rough plate




**RP-DLS-R-6I**  
6" LED Rough plate



**RP-DLS-R-4I**  
4" LED Rough plate

### Surface Mount Kit for **PT-BLP/PT-TRO Series**:



**SMK-UNI-24**  
2'x4' Universal  
Surface Mount Kit



**SMK-UNI-22**  
2'x2' Universal  
Surface Mount Kit



**SMK-UNI-14**  
1'x4' Universal  
Surface Mount Kit



**SMK-BLP-24**  
2'x4' Flat Panel  
Surface Mount Kit



**SMK-BLP-22**  
2'x2' Flat Panel  
Surface Mount Kit



**SMK-BLP-14**  
1'x4' Flat Panel  
Surface Mount Kit

**SMK-TRO-24**  
2'x4' Troffer  
Surface Mount Kit

**SMK-TRO-22**  
2'x2' Troffer  
Surface Mount Kit

**SMK-TRO-14**  
1'x4' Troffer  
Surface Mount Kit

### Flange Kit for **PT-BLP/PT-TRO Series**:



**FK-24**  
2'x4' Flange Kit



**FK-22**  
2'x2' Flange Kit




**FK-14**  
1'x4' Flange Kit



**JB-BPL**  
Junction box for  
Flat Panel  
(Field Install)

### Accessories for PT-LS1 Series:

#### WIRE GUARD



#### WG-LS1-4FT

Wire guard for 4-ft LS1  
(For 8-ft fixtures,  
two WG-LS1-4FT are needed)


#### CONNECTOR




#### CON-LS1

Connector

### Wire guard for PT-LHB Series:



#### WG-HBL4-2FT



#### WG-HBL4-4FT

### Shield for PT-ABL-R Series:



#### ABL-R-SHLD-180

Shield for PT-ABL-R  
series bollard


### Accessories for PT-RHB / PT-HBU3 Series:

#### MOUNTING OPTIONS



**UB-RHB-SM (11D)**  
**UB-RHB-LG (13D)**  
**UB-HBU3-SM (10D)**  
**UB-HBU3-LG (14D)**  
U-Bracket Mounting

#### REFLECTOR OPTIONS



**RFL-PC-RHB**  
**RFL-PC-HBU3**  
PC Reflector



**RFL-AL-RHB**  
**RFL-AL-HBU3**  
Aluminum Reflector



**RFL-PC-BC-RHB**  
**RFL-PC-BC-HBU3**  
PC Reflector  
Bottom Cover

#### LENS OPTIONS




**RHB-11D-L120**  
120° lens option



**RHB-13D-L120**  
120° lens option

#### WIREGUARD OPTIONS




**WG-RHB**  
**WG-RHBE**  
**WG-HBU3**  
Wire guard


### Mounting Options for PT-AL2N / PT-FL-H0 Series:



**SF-AL2 -(W)**  
Slipfitter Mount



**SPM-AL2-(W)**  
Adjustable Mount for  
Square/Round Pole



**SAM-AL2 -(W)**  
Straight Arm Mount  
for Square Pole



**TM-AL2 -(W)**  
Trunnion Mount



**UB-AL2 -(W)**  
U-Bracket Mount

### Shield Options for PT-AL2N Series:



**SHD-AL2-1015 -(W)**  
Shield for AL2 100W/150W



**SHD-AL2-2037 -(W)**  
Shield for AL2 200W/240W/300W/375W

### Aircraft Cable Mounting:



**A-CBL**  
4' Aircraft Cable



**A-CBL-10FT**  
10' Aircraft Cable

### Remote Head for PT-EXL-C-S-RC and PT-EML-S-RC Series:



**EML-S-WL-1H**  
1 Wet Location  
Remote Head



**EML-S-WL-2H**  
2 Wet Location  
Remote Heads



**EML-S-DL-1H**  
1 Damp Location  
Remote Head




**EML-S-DL-2H**  
2 Damp Location  
Remote Head



POLES ACCESSORIES


(Products stocked in bronze. White and black are available at an additional charge.)

WALL BRACKET




Cat. No.
<b>PT-AL-P-WMB2-90</b> Wall Mount "L" Bracket

The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole.  
(Available in Gray color)



Cat. No.
<b>PT-AL-P-WMB2-2</b> Wall Mount Straight Bracket


The wall mount straight bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole.



Cat. No.
<b>PT-AL-P-WMB2-3</b> Wall Mount Straight Bracket

The wall mount straight bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole.  
(Available in Gray color)

HORIZONTAL SQUARE TENON




(For complete dimension, please see spec sheet)

Cat. No.
<b>PT-AL-P-HST2-1</b> Horizontal Square Tenon



4" - 90° single horizontal square pole tenon base is with 4 screw holes.  
(Available in Gray color)




(For complete dimension, please see spec sheet)

Cat. No.
<b>PT-AL-P-HST2-2</b> Horizontal Square Twin Tenon



4" - 180° twin horizontal square pole tenon base is with 4 screw holes.




(For complete dimension, please see spec sheet)

Cat. No.
<b>PT-AL-P-HST2-4</b> Horizontal Square Quad Tenon



4" - 90° quad horizontal square pole tenon base is with 4 screw holes.  
(Available in Gray color)

VERTICAL SQUARE



Cat. No.
<b>PT-AL-P-VST2-1</b> Vertical Square Pole Tenon

4" single vertical square pole tenon base is with 4 screw holes.  
(Available in Gray color)

VERTICAL ROUND



Cat. No.
<b>PT-AL-P-VRT2-1</b> Vertical Round Pole Tenon Bracket


4" vertical round pole tenon adapter base is with 6 screw holes.  
(Available in Gray color)




VERTICAL ROUND TENON




Cat. No.  
**PT-AL-P-VRT2-2**  
Twin Vertical Round Pole Tenon Bracket  
4" twin vertical round pole tenon base is with 8 screw holes.

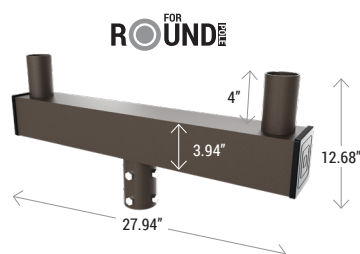


Cat. No.  
**PT-AL-P-VRT2-2-LG**  
Large Twin Vertical Round Pole Tenon Bracket  
Large 4" twin vertical round pole tenon base is with 8 screw holes.




Cat. No.  
**PT-AL-P-VRT2-3**  
Triple Vertical Round Pole Tenon Bracket  
4" triple vertical round pole tenon base is with 8 screw holes.

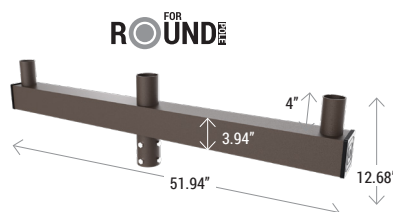

Cat. No.  
**PT-AL-P-VRT2-3-LG**  
Large Triple Vertical Round Pole Tenon Bracket  
Large 4" triple vertical round pole tenon base is with 8 screw holes.



Cat. No.  
**PT-AL-P-VRT2-4**  
Quad Vertical Round Pole Tenon Bracket  
4" quad vertical round pole tenon base is with 8 screw holes.

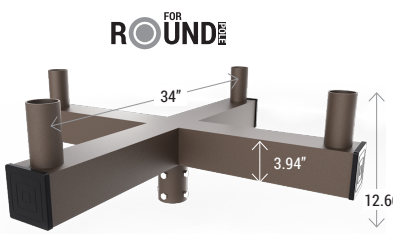

Cat. No.  
**PT-AL-P-VRT2-4-LG**  
Large Quad Vertical Round Pole Tenon Bracket  
Large 4" quad vertical round pole tenon base is with 8 screw holes.

BULLHORN TENON




Cat. No.  
**PT-AL-P-BH2-2**  
Bullhorn Tenon for Round Pole  
Short 180° double bullhorn base with 8 screw holes.




Cat. No.  
**PT-AL-P-BH2-2-LG**  
Large Bullhorn Tenon for Round Pole  
Large 180° double bullhorn base with 8 screw holes.




Cat. No.  
**PT-AL-P-BH2-3**  
Bullhorn Tenon for Round Pole  
Short 180° triple bullhorn base with 8 screw holes.

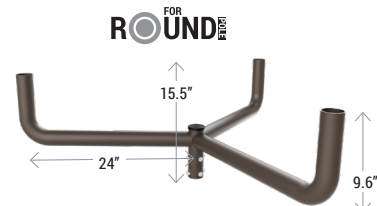

Cat. No.  
**PT-AL-P-BH2-3-LG**  
Large Bullhorn Tenon for Round Pole  
Large 180° triple bullhorn base with 8 screw holes.



Cat. No.  
**PT-AL-P-BH2-4**  
Bullhorn Tenon for Round Pole  
Short 180° quad bullhorn, base with 8 screw holes.

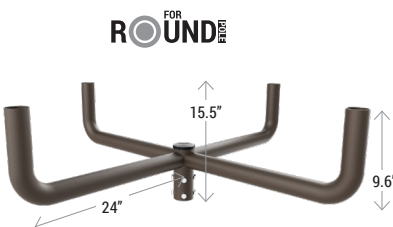

Cat. No.  
**PT-AL-P-BH2-4-LG**  
Large Bullhorn Tenon for Round Pole  
Large 180° quad bullhorn, base with 8 screw holes.



## EM BATTERY

PORTOR<sup>®</sup>  
LIGHTING

At Portor Industry, we believe that “ease of doing business” is one of our best traits. Please use the table below as an easy reference chart to learn which emergency batteries are compatible with each of our Portor Lighting fixtures.

EM BATTERY MODEL	PORTOR PRODUCT		
<b>PT-EMD SERIES</b>  <b>8W*</b>   <b>16W**</b>   <b>32W***</b>	<b>PT-LHB Series - Linear High Bay</b>  • PT-LHB-105W-2CCT** • PT-LHB-155W-2CCT** • PT-LHB-170W-2CCT*** • PT-LHB-210W-2CCT*** • PT-LHB-300W-2CCT***		<b>PT-TRO/TRO2 Series - Troffer</b>  <b>2' X 4' Series*</b> <b>2' X 2' Series*</b>
<b>PT-EMG SERIES</b>  <b>8W</b>   <b>15W</b>   <b>25W</b>	<b>PT-BLP Series - Back-lit Flat Panel</b>  <b>2' X 4' Series</b>   <b>1' X 4' Series</b>   <b>2' X 2' Series</b>		<b>PT-CDL2 Series - Commercial</b>  <b>6" / 8" / 10"</b> <b>PT-DLS2-R-277 Series - Slim</b>  <b>4" / 6"</b>
<b>PT-EMU3 SERIES</b>  <b>40W</b>	<b>PT-RHB/RHBE Series - Round High Bay</b>  <b>PT-RHB-11D-3CP</b>   <b>PT-RHB-13D-3CP</b>   <b>PT-RHBE-240W-50K</b> Field installation only   Field installation only   Field installation only <b>PT-RHBE-150W-50K</b> Field installation only		
<b>PT-PT-EMN-08W-050</b> 	<b>LINEAR STRIP / WRAPAROUND / VAPORTIGHT Series</b>  <b>PT-LSFA-4FT / PT-LS1-4FT Series</b>   <b>PT-WA1 / PT-WAFA Series</b>   <b>PT-VT2-4F Series</b>   <b>CLVS-MO-4F Series</b>		
<b>PT-PT-EMN-15W-050</b> 	<b>LINEAR STRIP / VAPORTIGHT Series</b>  <b>PT-LSFA-8FT / PT-LS1-8FT Series</b>   <b>PT-VT2-8F Series</b>   <b>CLVS-MO-8FT Series</b>		

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE.

At Portor Industry, we believe that “ease of doing business” is one of our best traits. Please use the table below as an easy reference chart to learn which motion sensors are compatible with each of our Portor Lighting fixtures.

PORTOR PRODUCT	MOTION SENSOR MODEL NUMBER	REMOTE CONTROL OPTION
 <b>PT-AL2N Series</b> Area/Site Light with Wattage Selector	 <b>MS-UNI-MW2</b> Microwave Motion Sensor	 <b>MSH-RC2</b> Remote Control
 <b>PT-WPH3 Series</b> Wall Pack Luminaire with CCT and Wattage Selector	 <b>MS-WP3</b> Microwave Motion Sensor (100V-277V)	 <b>MSS-RC-100</b> Remote Control
 <b>PT-CAS1-LW</b> <b>PT-CAS1-MW</b> Round Canopy Luminaire with CCT and Wattage Selector	 <b>PT-UNI-35-PR</b> Dimmable PIR Motion Sensor	 <b>MSS-RC-100</b> Remote Control
 <b>PT-VS-MO</b> <b>PT-VS-WD</b> Vapor-Seal Luminaire with CCT and Wattage Selector	 <b>PT-MSH-LV-MW</b> Microwave Motion Sensor	 <b>MSH-RC2</b> Remote Control
 <b>PT-WA2 Series</b> <b>PT-WAFA Series</b> Wraparound Luminaire with CCT and Wattage Selector	 <b>MS-MW</b> Microwave Motion Sensor	 <b>MSH-RC2</b> Remote Control
 <b>PT-RHB Series</b> Round High Bay with CCT and Wattage Selector	 <b>PT-UNI2-SP-PR</b> Dimmable PIR Motion Sensor	 <b>MSH-RC2</b> Remote Control
 <b>PT-LHB Series</b> Linear High Bay with CCT Selector	 <b>PT-UNI-35-PR</b> Dimmable PIR Motion Sensor  <b>ELB-UNI-35</b> Elbow for UNI-35-PR	 <b>MSS-RC-100</b> Remote Control
 <b>PT-LS1 Series</b> Linear Strip Luminaire with CCT and Wattage Selector	 <b>PT-UNI-35-PR</b> Dimmable PIR Motion Sensor  <b>ELB-UNI-35</b> Elbow for UNI-35-PR  <b>MSK-LV-MW</b> Low Voltage Motion Sensor	 <b>MSS-RC-100</b> Remote Control  <b>MSK-LV-RC</b> Low Voltage Remote Control

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE.



## LIMITED PRODUCT WARRANTY

Portor Industry, Inc. (Company) warrants goods (Product) sold to purchaser (Customer) from defects in material and workmanship within our warranty period from the date of shipping (proof of purchase required), for a period of 5 (five) years.

Third party components, such as motion sensors, that are not manufactured by Portor Industry, Inc., are subject to the third party manufacturer's warranty and are not covered by this warranty. Any defect that is caused by improper use, improper installation, abuse, misuse, or modified in any way not authorized by Company, is excluded from this warranty.

This warranty is further conditioned upon proper storage, installation, use and maintenance. This is not applicable to any product which is not installed and operated in accordance with the National Electric Code (NEC), the Standards Institute (ANSI), or, in Canada, the Canadian Standards Association (CSA), and with the driver manufacturer's instructions and guidelines for the product. This warranty does not apply to damage or failure to perform arising from abuse, misuse, abnormal stresses and operating conditions, lightning, electrical surges or acts of God.

If any Product covered by this warranty is claimed to be defective, Company will replace Product after Customer has shipped Product back to Company for inspection (Company will pay for shipping costs). If Product is deemed to be defective by Company, Company will replace Product to Customer at no charge. If product has been discontinued or is otherwise not available, Company and Customer shall agree on replacement with a comparable product. Company will not pay for any removal or re-installation costs or expenses, including labor costs or expenses.

**THIS LIMITED WARRANTY IS THE ONLY WARRANTY GIVEN BY PORTOR INDUSTRY, INC. WITH RESPECT TO THE PRODUCTS AND THE SOLE REMEDY FOR ANY AND ALL CLAIMS, IN CONTRACT, IN TORT OR OTHERWISE ARISING FROM THE FAILURE OF PRODUCT.**

This limited warranty is effective for the purchases of the Product on or after the effective date set forth herein and is in consideration of and is expressly subject to and conditioned by the terms set forth herein. Portor Industry, Inc. reserves the right to modify this warranty from time to time and any modifications shall be effective for all orders placed on or after the effective date of such revised warranty.

**PORTOR**  **INDUSTRY**®  
A LED LIGHTING MANUFACTURER





# CATALOG 2025 EDITION

## PORTORINDUSTRY® A LED LIGHTING MANUFACTURER

### PORTOR LIGHTING

540 N. Loop Drive,  
Ontario, CA 91761

E-mail: [info@portorindustry.com](mailto:info@portorindustry.com)  
Tel: 323-516-6458

The products depicted in this "Quick Reference Catalog" are for promotional purposes only. Any reproduction or alteration, without the express written consent of Portor Industry or Portor Lighting, is strictly forbidden. Subject to change without notice. Portor Lighting is not responsible for any typographical errors. Actual colors of products may vary from printing.

© Portor Lighting 2024. All rights reserved.

Designed in U. S. A.

1. We offer a 5-year limited warranty on all fixtures.  
Please visit website for more details.
2. You can download information about our products  
(Spec Sheets and IES files) from our website ([www.portorlighting.com](http://www.portorlighting.com)).

**PORTOR**  
LIGHTING  
[www.portorlighting.com](http://www.portorlighting.com)

Members:



Connect with us:



SCAN ME TO DOWNLOAD